




R&D for a SiW electromagnetic calorimeter for a future linear collider

Roman Pöschl
LAL Orsay

Seminar 10/3/2011 at



Scientific activities

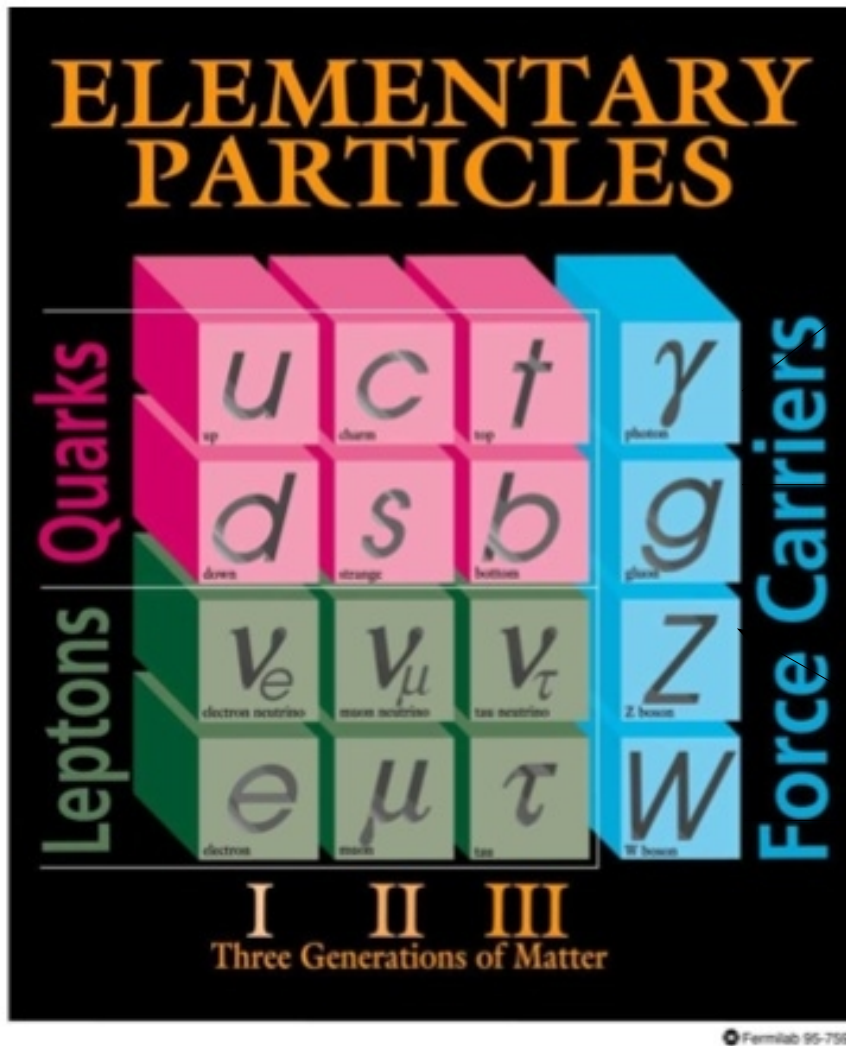

Standard Model of particle physics

Electromagnetism (2003-2006)

► Polarised positrons at E166

Instrumentation: Realisation of Compton polarimeter

s/w and Analysis: Data reconstruction
Magnetisation of analysers

Quantum chromodynamics at HERA (1994-2003, PhD 2000)

► **Analysis:** Parton dynamics through di-jet rates

Instrumentation: Trigger level 2

Software: Reconstruction of backward H1 calorimeter (SpaCal)

Electroweak interactions at the ILC (since 2003)


Analysis: Higgs boson production

Instrumentation: R&D program of CALICE, Beam tests

Software: Developpement of tools for data reconstruction and grid exploitation


Beyond the Standard Model

Dark matter

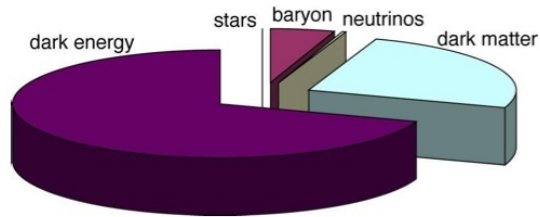


25% of the universe composed by dark matter

Supersymmetry?

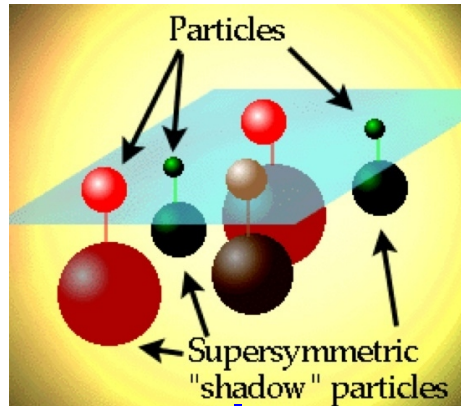


Higgs Boson

Unification of forces

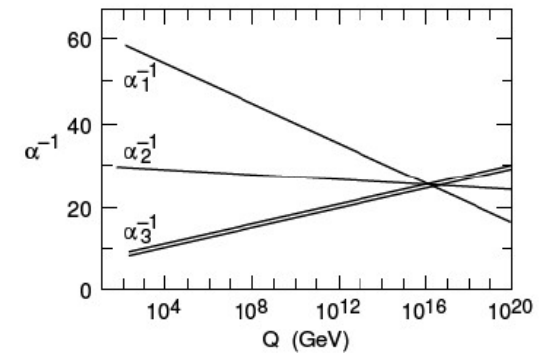

Do the forces become one?

Striking difference in fermion masses

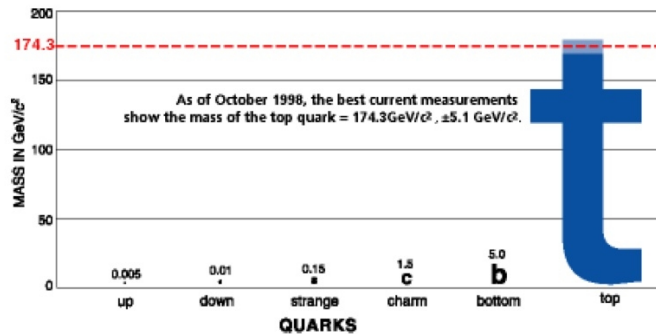

Extra dimensions?

Higgsless models



Arguments for experiments at the TeV scale



- 1) Compelling arguments for the existence of a **light Higgs** boson

$$114.4 \text{ GeV} < m_H < 1 \text{ TeV}$$

- 2) **New physics** in the domain 0.1 TeV – 1 TeV ?

Exploration by new generation of accelerators

(Future) Linear electron-positron accelerators

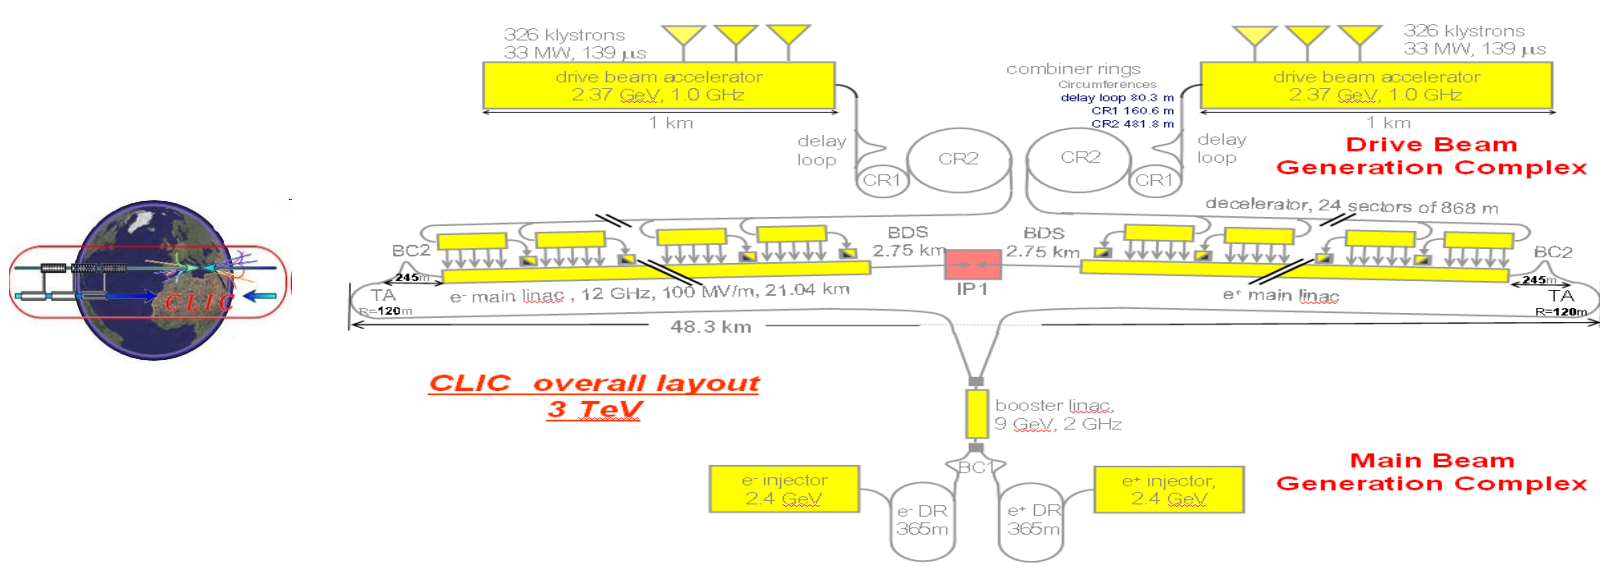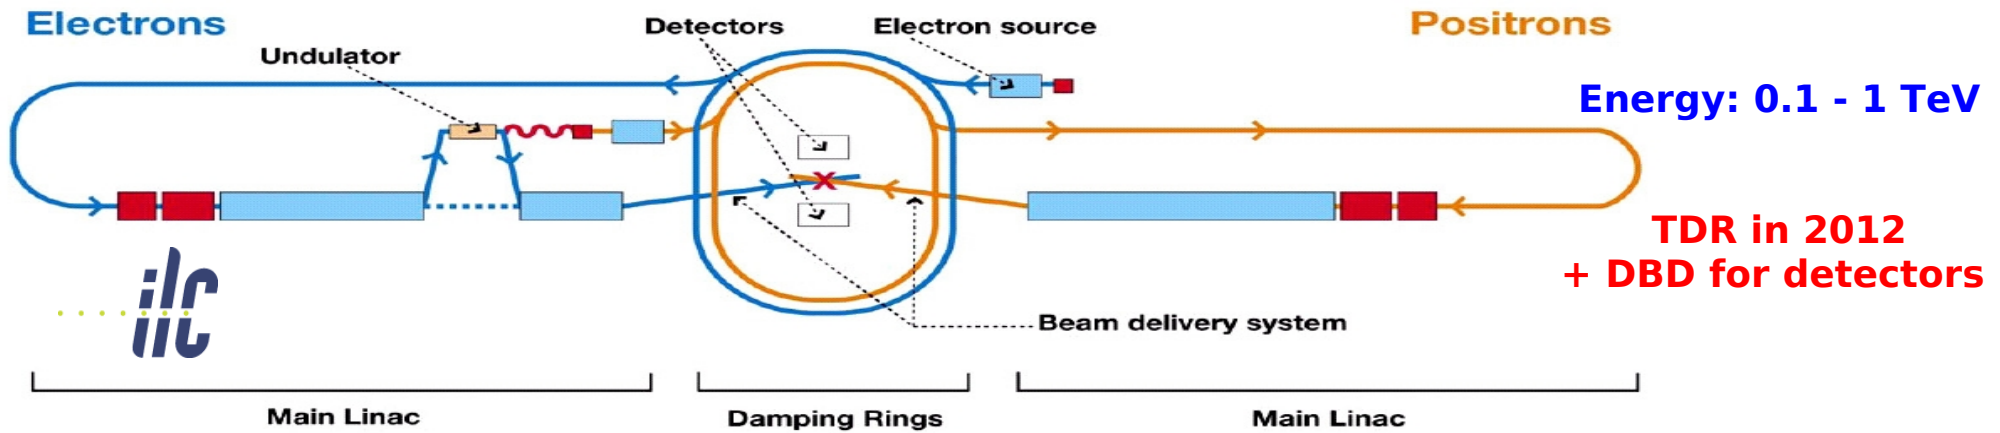

Energy: 0.5 - 3 TeV

CDR in 2011


Linear collider is integral part of European Strategy beyond 2012

Hadronic decays of W and Z Bosons


Boson Boson scattering

What if no Higgs?

Manifestation of new physics
Strong electroweak symmetry breaking

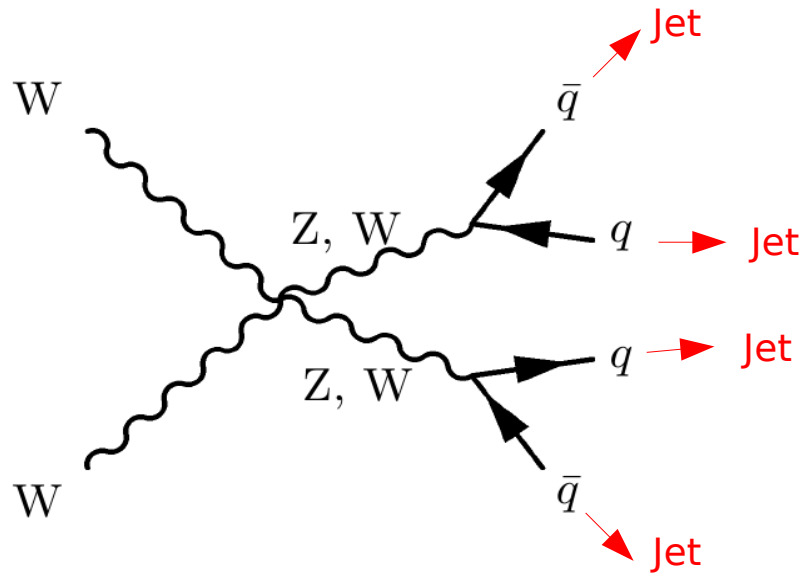

W, Z separation in the ILD concept

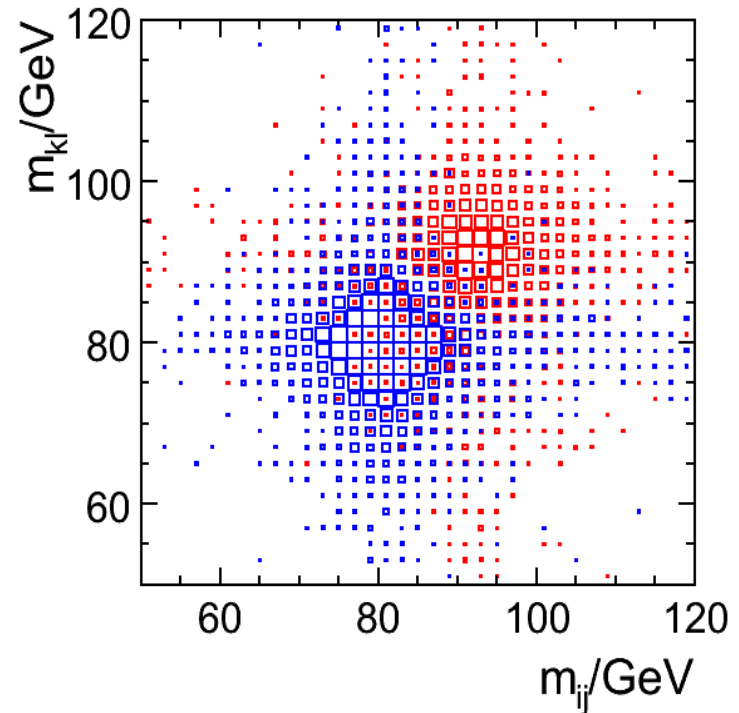


Remember: $M_Z - m_W \approx 10 \text{ GeV}$

- Need excellent jet energy resolution to separate W and Z bosons in their hadronic decays
 $3\%/E_{\text{jet}} - 4\%/E_{\text{jet}}$

Jet energy resolution

Final state contains high energetic jets from e.g. Z,W decays
Need to reconstruct the jet energy to the utmost precision !

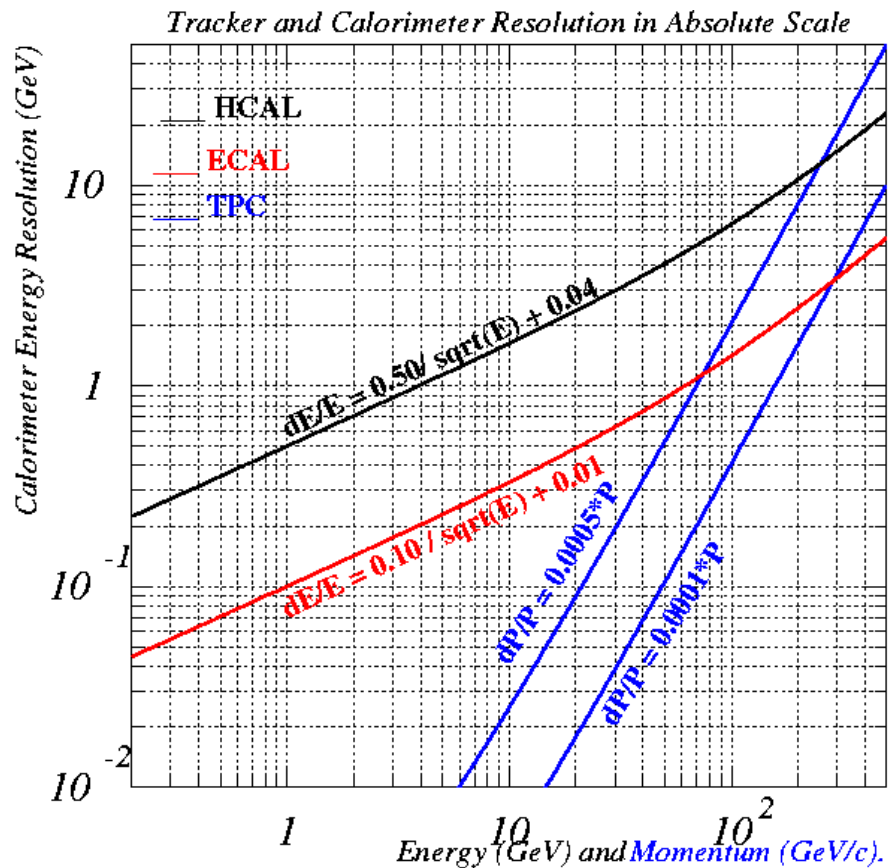

Tracker Momentum Resolution GeV/c


Jet energy carried by ...

- Charged particles (e^\pm, h^\pm, μ^\pm): 65%
Most precise measurement by tracker
Up to 100 GeV
- Photons: 25%
Measurement by electromagnetic calorimeter (ECAL)
- Neutral Hadrons: 10%
Measurement by hadronic calorimeter (HCAL) and ECAL

$$\sigma_{Jet} = \sqrt{\sigma_{Track}^2 + \sigma_{Had.}^2 + \sigma_{elm.}^2 + \sigma_{Confusion}^2}$$

Confusion term

- Base measurement as much as possible on measurement of charged particles in tracking devices
- Separate of signals by charged and neutral particles in calorimeter

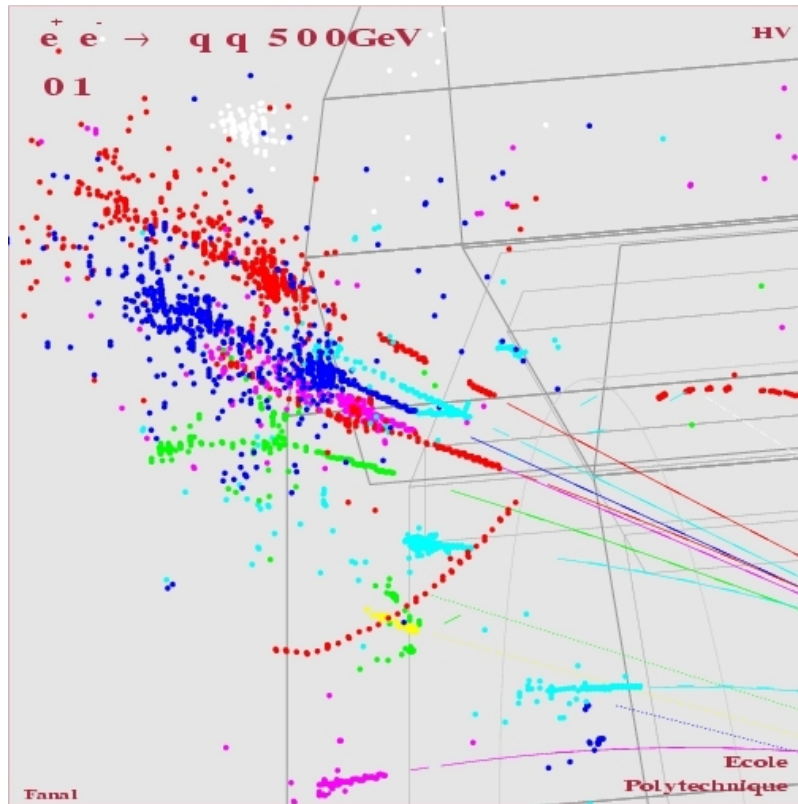

- Complicated topology by (hadronic) showers
- Correct assignment of energy nearly impossible

⇒ Confusion Term


Need to minimize the confusion term as much as possible !!!

Detector and calorimeter concept – Particle flow

Jet energy measurement by measurement of **individual particles**
Maximal exploitation of precise tracking measurement


- large radius and length
 - to separate the particles
- large magnetic field
 - to sweep out charged tracks
- “no” material in front of calorimeters
 - stay inside coil
- small Molière radius of calorimeters
 - to minimize shower overlap
- **high granularity of calorimeters**
 - to separate overlapping showers

Physics goals at the ILC require the
construction of highly granular calorimeters!!!
Emphasis on tracking capabilities of calorimeters

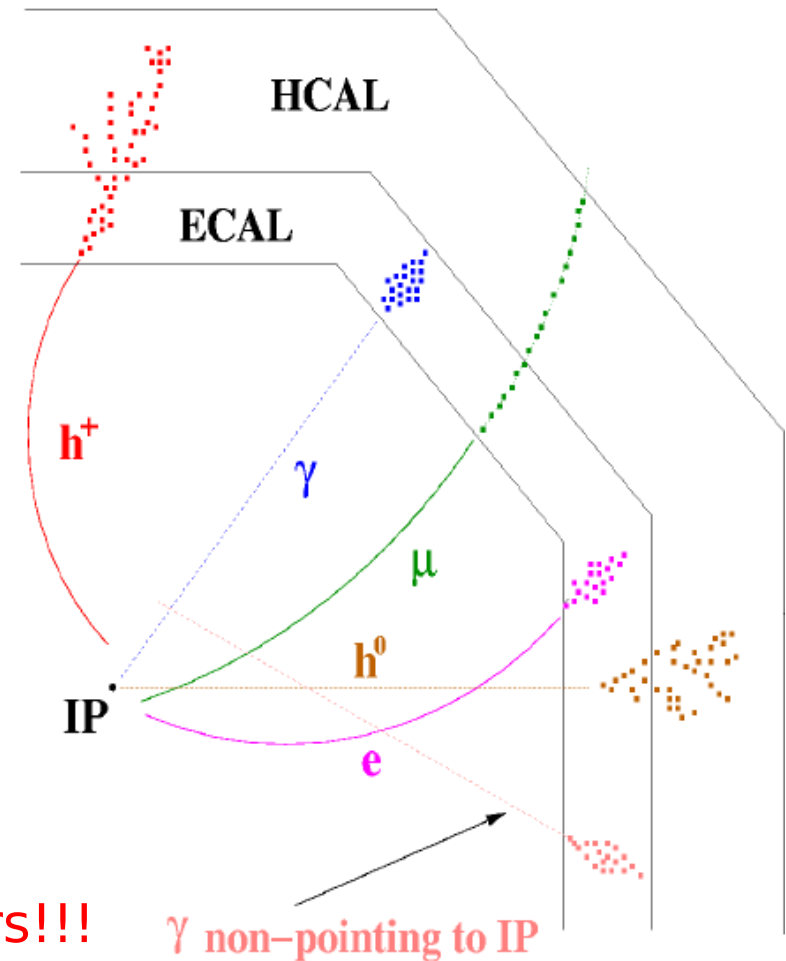

SiW Ecal - Basics

The SiW Ecal in the ILD Detector

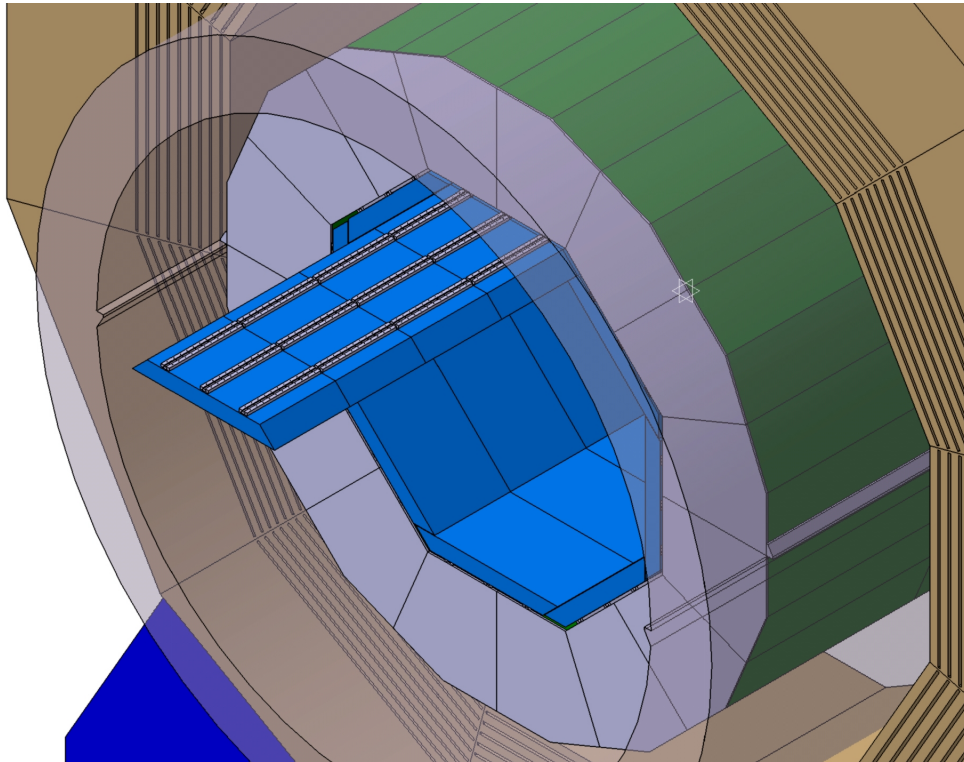

Basic requirements

- Extreme high granularity
- Compact and hermetic

Basic choices

- Tungsten as absorber material
 - $X_0=3.5\text{mm}$, $R_M=9\text{mm}$, $\lambda_I=96\text{mm}$
 - Narrow showers
 - Assures compact design
- Silicon as active material
 - Support compact design
 - Allows for pixelisation
 - Large signal/noise ratio


SiW Ecal designed as particle flow calorimeter

SiW Ecal optimisation

LOI for 2009 ILC Detectors

Optimisation using jet events and Pandora particle flow algorithm

Lateral granularity of SiW Ecal

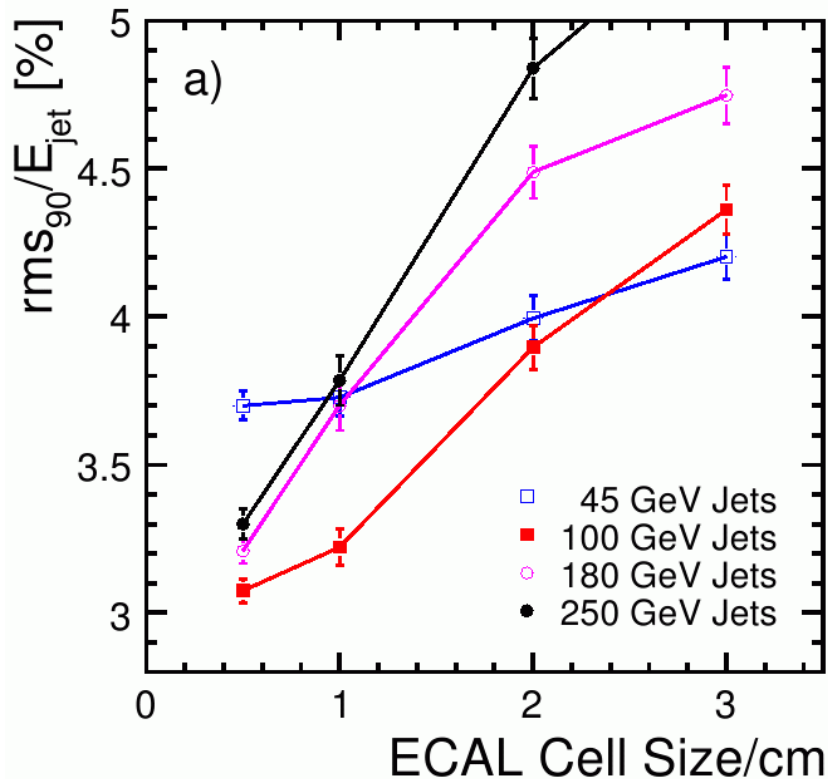

Jet energy resolution strongly sensitive on cell dimensions

- Better separation power
- Importance grows towards higher energies

High granularity of Ecal is crucial for precision measurements

Calorimeter R&D for a future linear collider





~330 physicists/engineers from 57 institutes
and 17 countries from 4 continents

- Integrated R&D effort
- Benefit/Accelerate detector development due to common approach

The Calice Mission

Final goal:

A **highly granular** calorimeter optimised for the **Particle Flow** measurement of multi-jets final state at the International Linear Collider

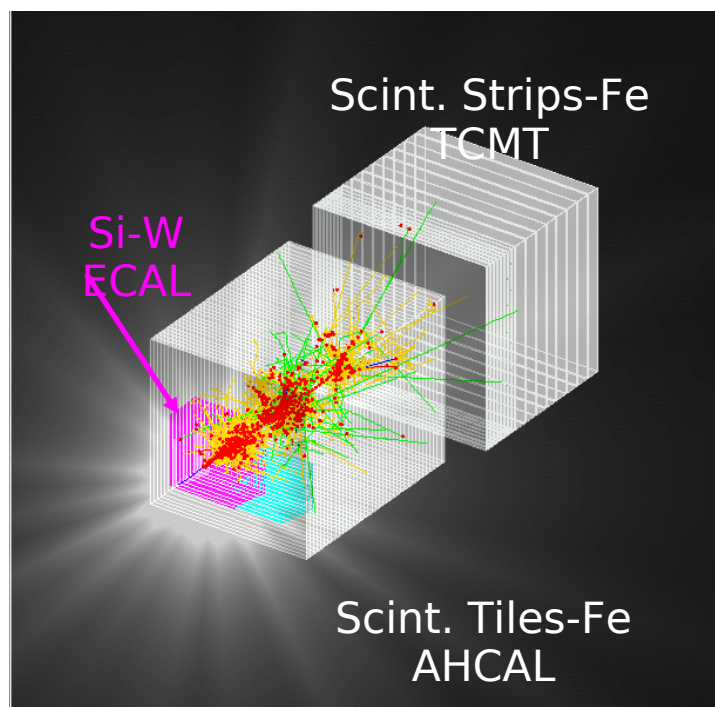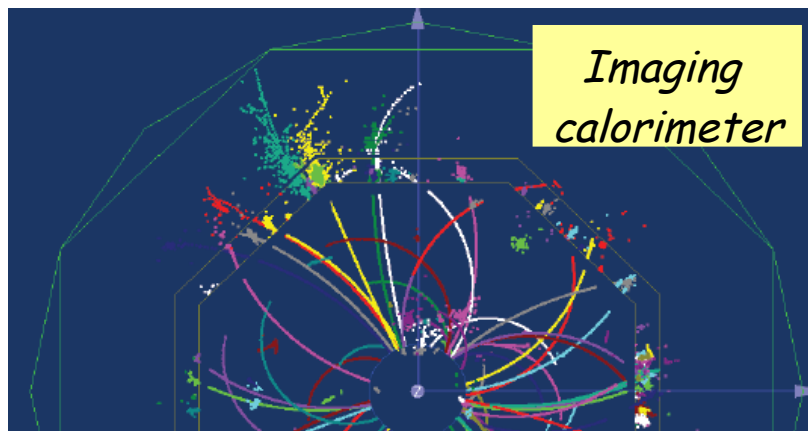


Intermediate task:

Build prototype calorimeters to

- Establish the technology
- Collect hadronic showers data with **unprecedented granularity** to

- tune clustering algorithms
- validate existing MC models

SiW Ecal Physics Prototype

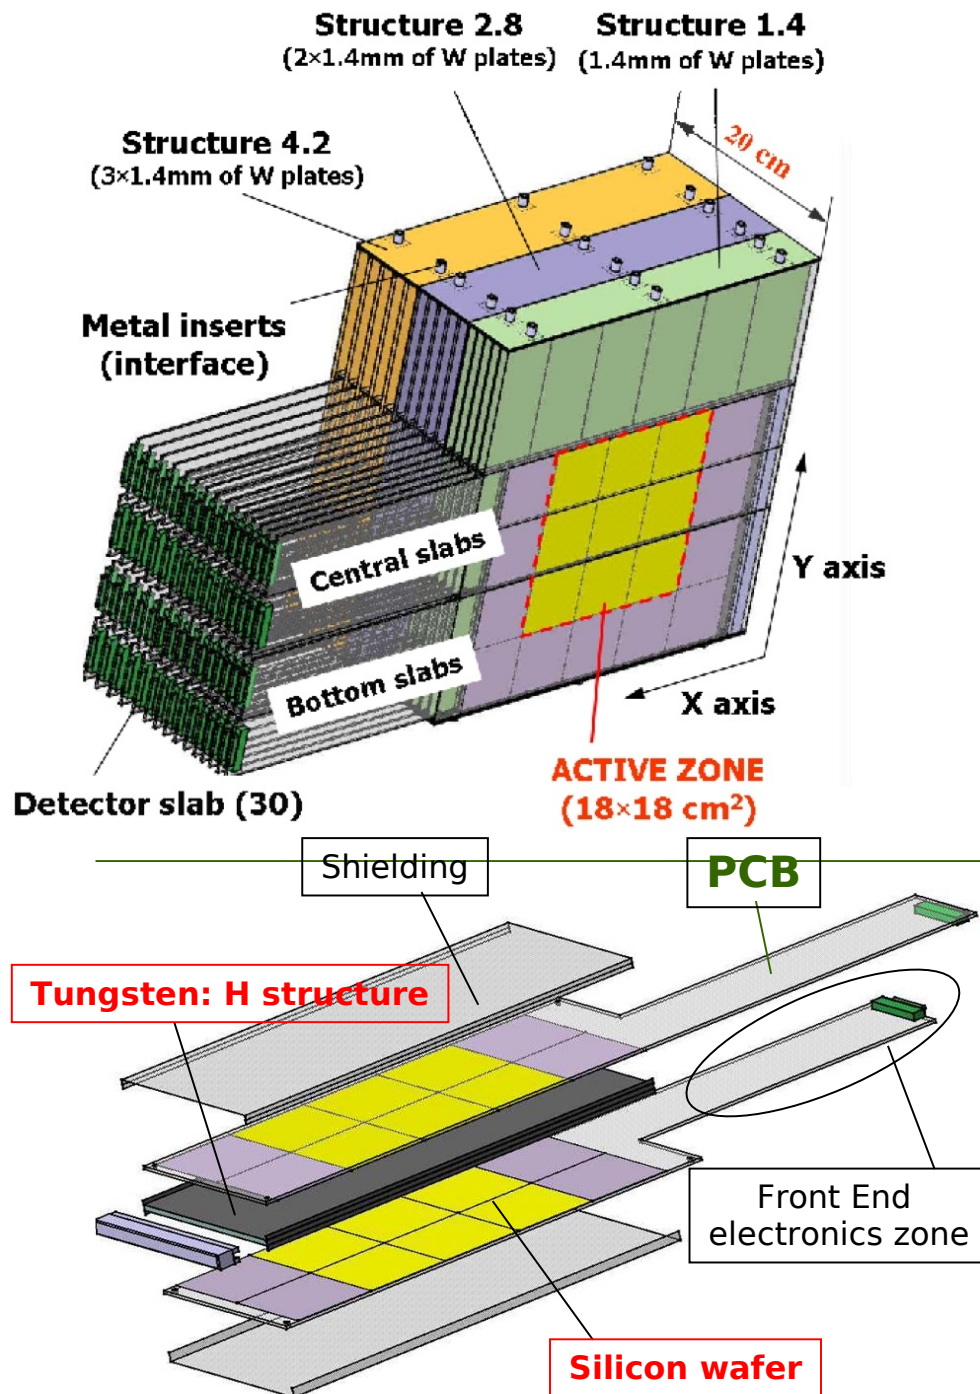


30 layers of tungsten:

- 10 x 1.4 mm (0.4 X_0)
- 10 x 2.8 mm (0.8 X_0)
- 10 x 4.2 mm (1.2 X_0)
- ▶ 24 X_0 total, 1 λ_1

½ integrated in detector housing
 ⇒ Compact and self-supporting detector design

6x6 PIN diode matrix

Resistivity: 5k Ω cm - 80 (e/hole pairs)/ μ m

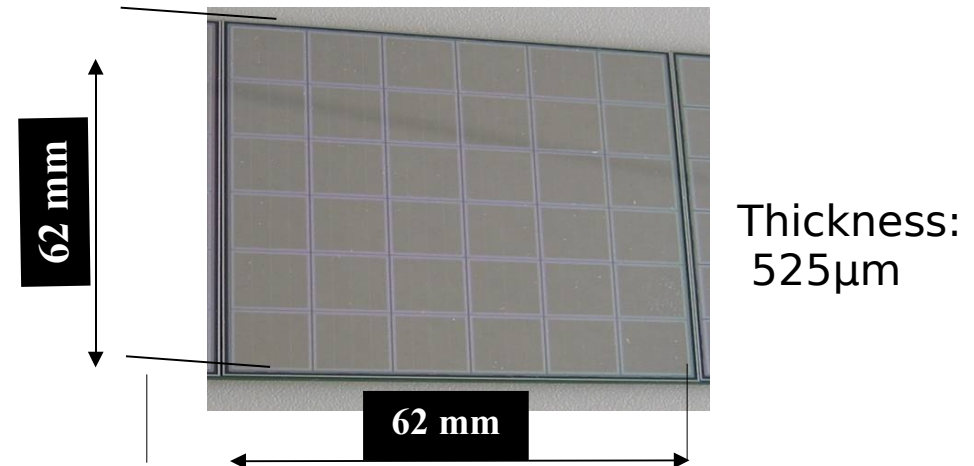

Total: 9720 Pixels/Channels

French groups working on SiW Ecal



Silicon sensors, DAQ, mechanics



Mechanics, e.g. cooling
Front end electronics



Silicon sensors
Front end electronics



Front end electronics,
Detector assembly and mechanics





Envisaged, ongoing discussion

Large scale beam tests

Experimental setup


Zoom into Ecal

Particle distance ~ 5 cm
→ No confusion !!!

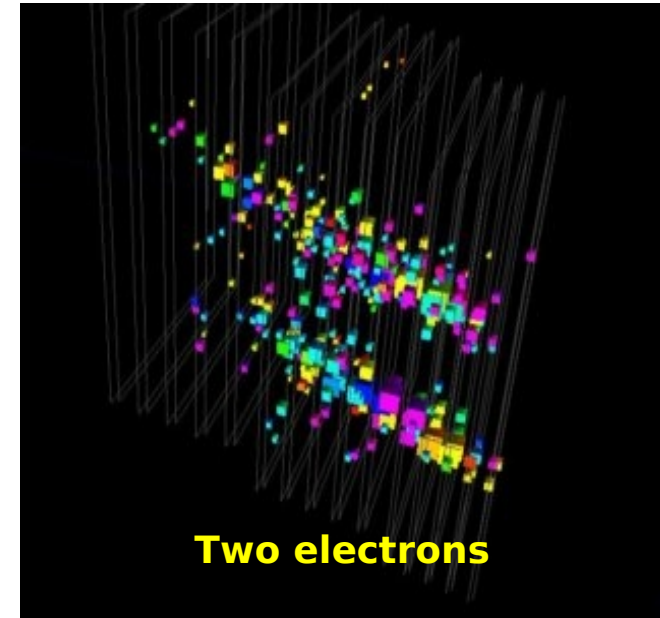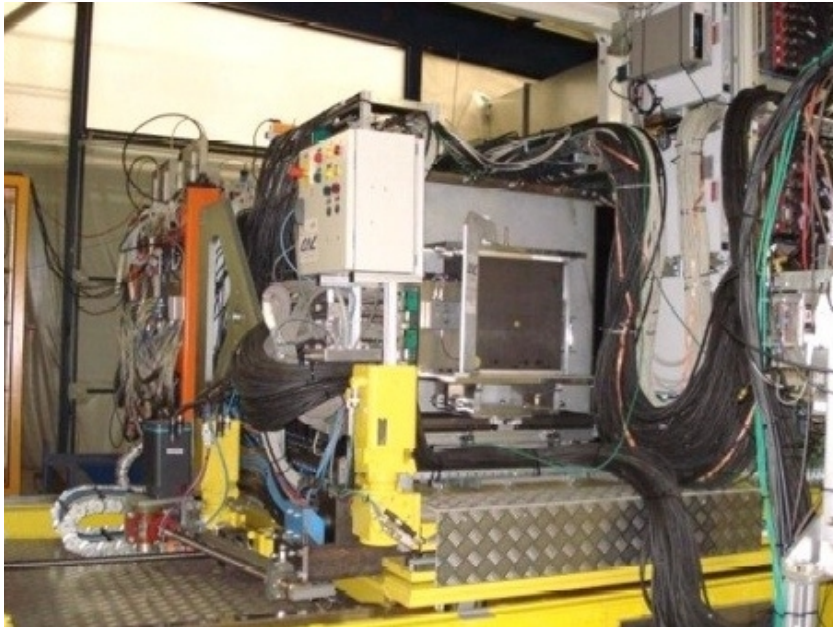

- 2006, Ecal 2 / 3 equipped
Low energy electrons (1-6 GeV at DESY), high energy electrons (6-50 GeV at CERN)
- 2007, Ecal nearly completely equipped
High energy pions (6-120 GeV CERN), Tests of embedded electronics
- 2008 FNAL, Ecal completely equipped
Pions at low energy,
Data taking with Digital Hcal (>2010?)

Calibration – Uniformity of response

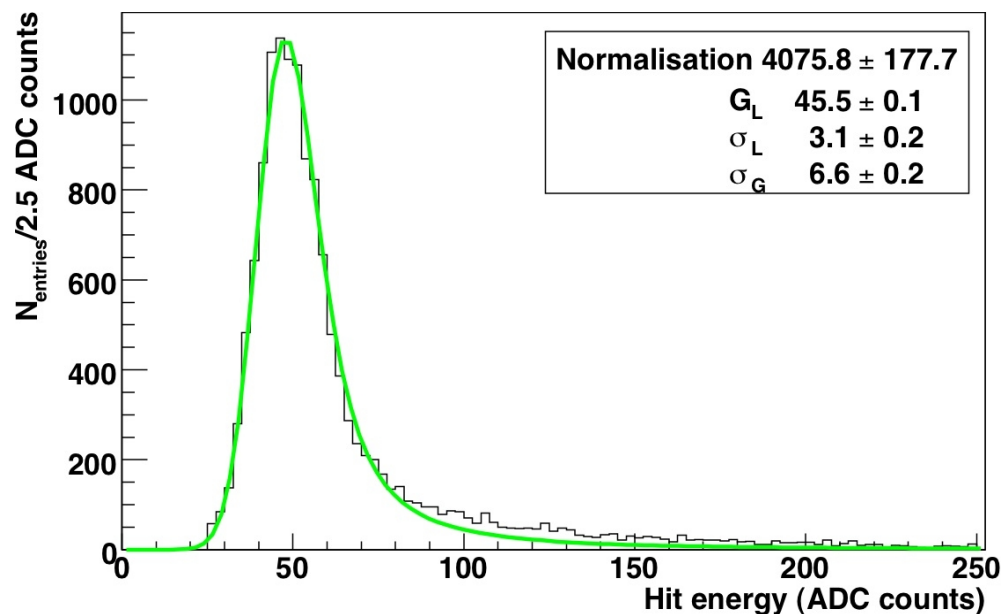

Calibration with wide spread μ -beam


18 Mio. Events

Uniform response of all cells
only 1.4‰ dead cells

Differences in response can
be attributed to different

- Manufacturers
- Production series

Experience to deal with different
manufacturers and production series
Essential for final detector
~3000m² of Silicon needed


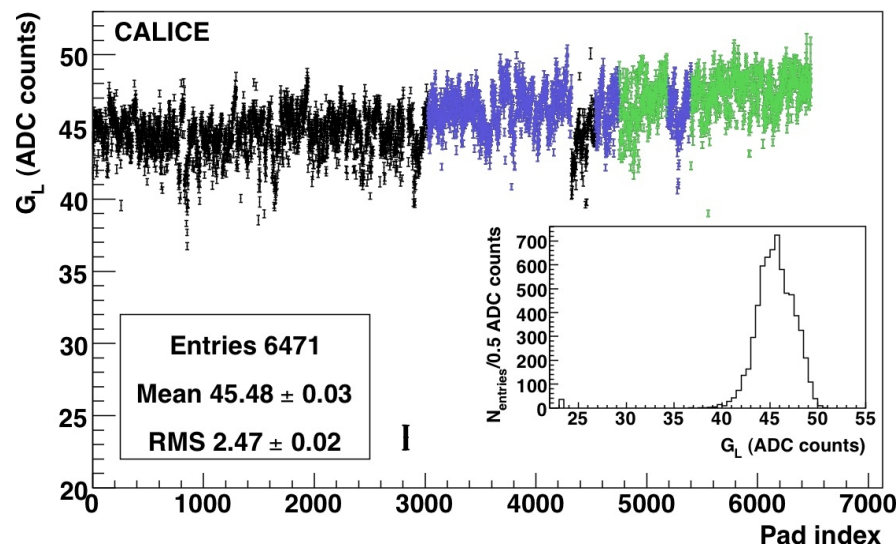


Stability of calibration?

Important criterium during evaluation process by IDAG

Affects both: precision and operability of detector: $\sim 10^8$ calo cells in ILC Detector

Calibration constants in different beam test campaigns

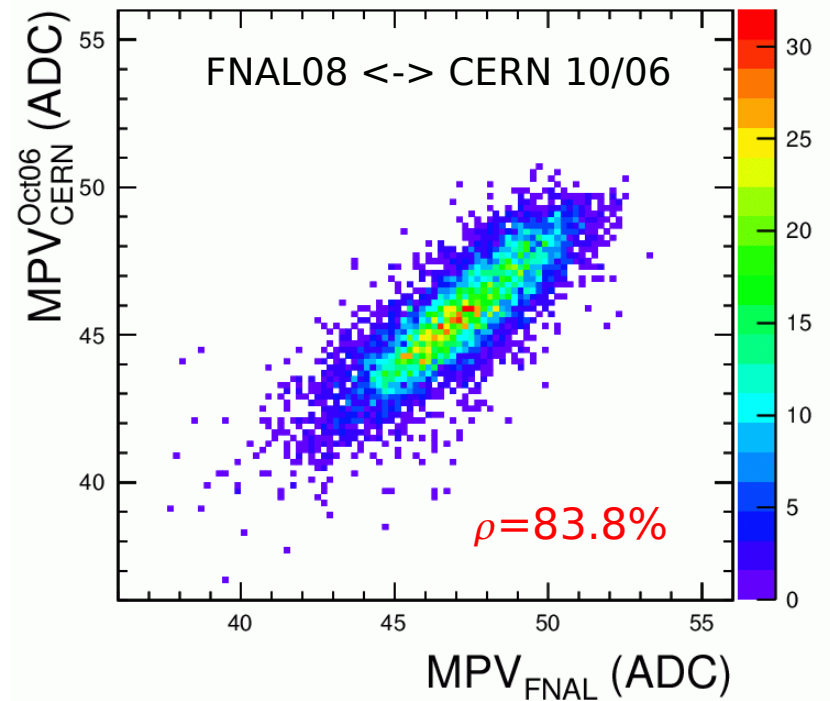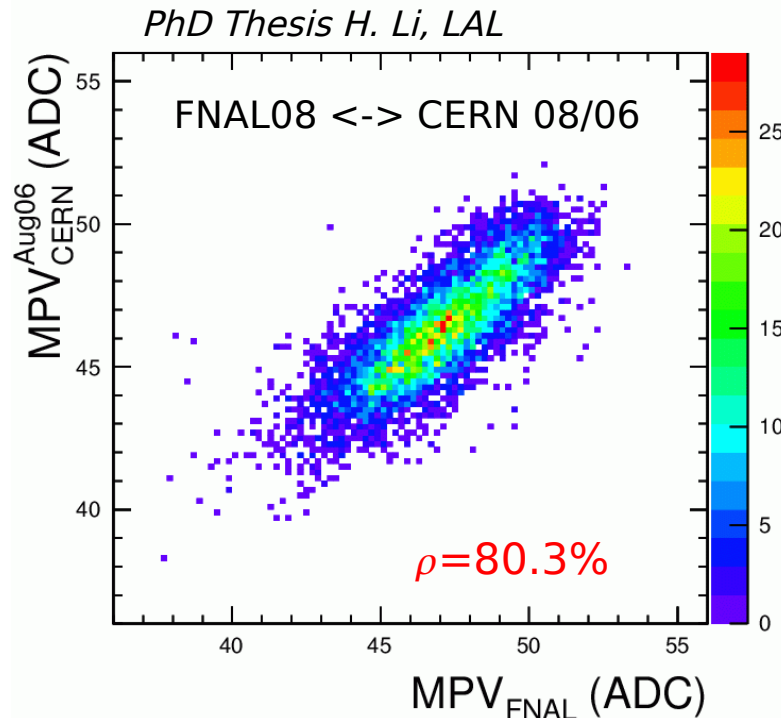


High correlation between calibration constants

For “final” detector:


Detector modules can be calibrated in beam test prior to installation

Linearity of response

Overview


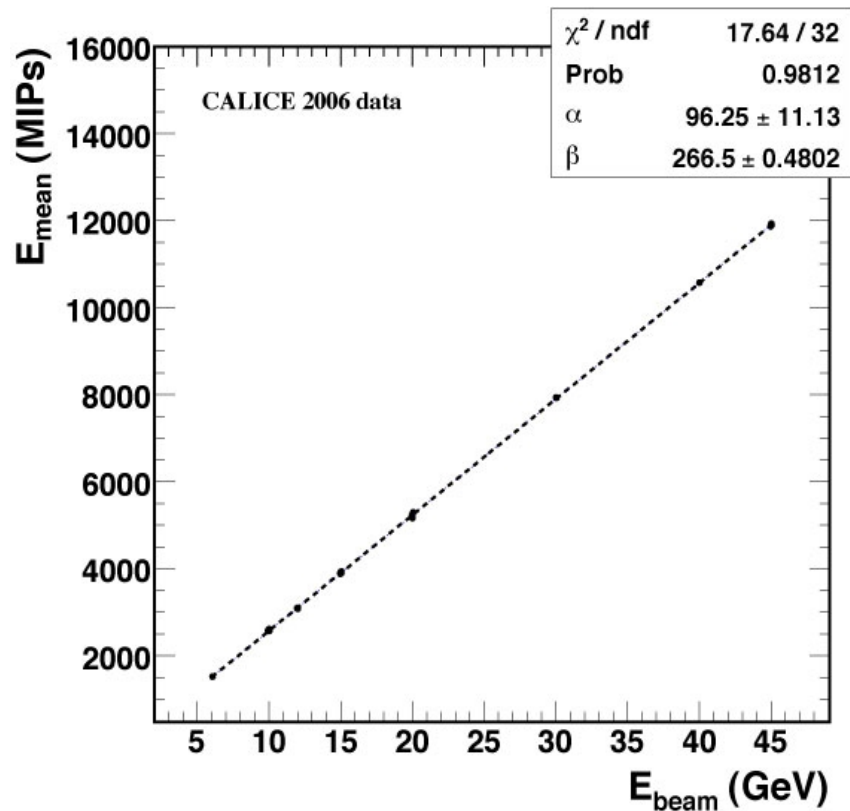


Residuals

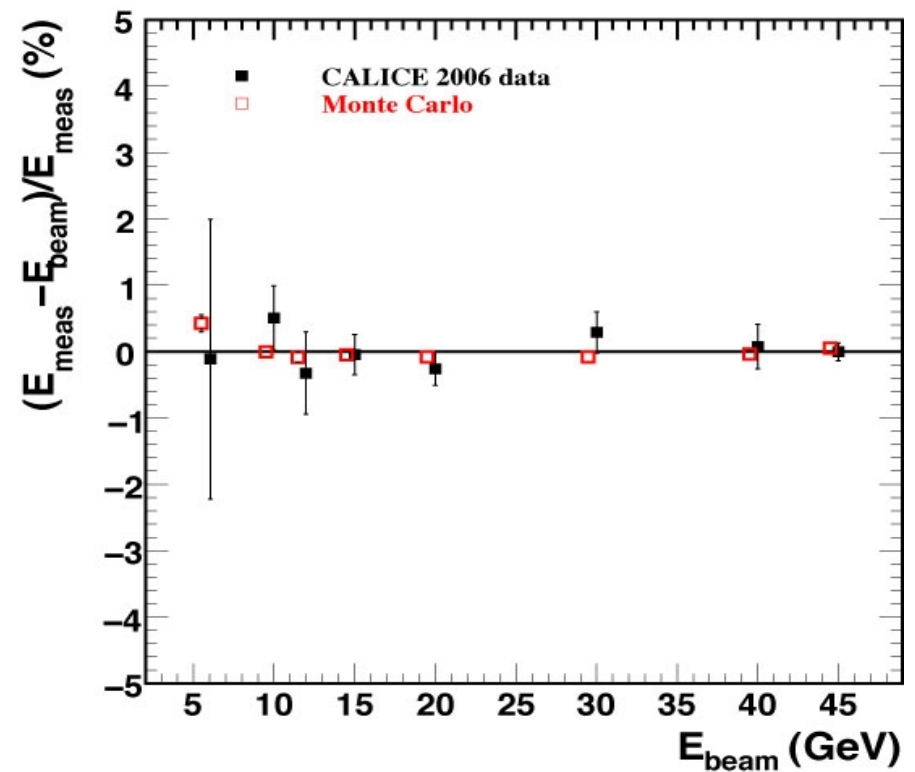

- Highly linear response over large energy range
- Linearity well reproduced by MC
MIP/GeV ~ 266.5 [1/GeV]
- Non-linearity $O(1\%)$

Energy resolution

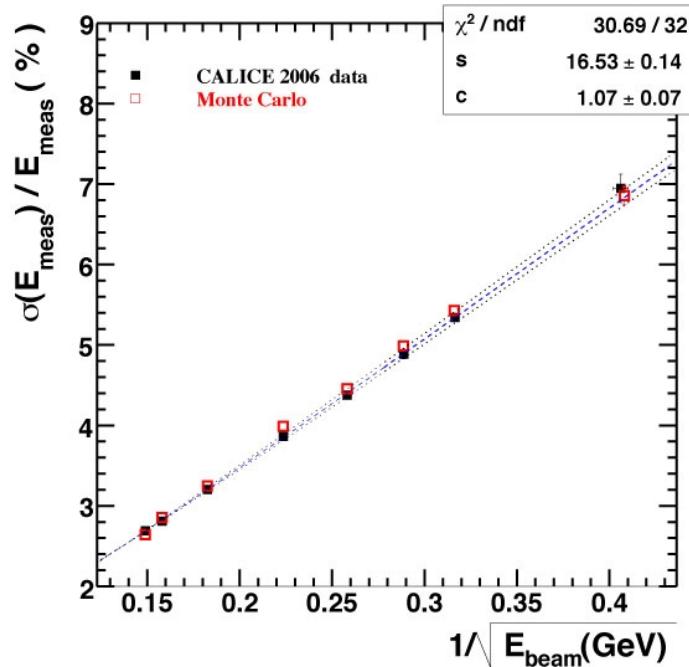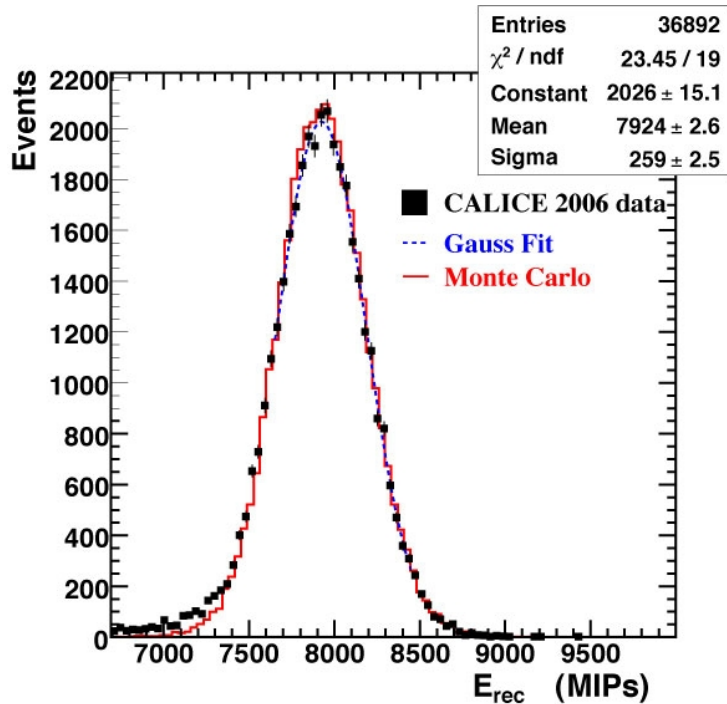

Example 30 GeV electron beam:

Gaussian like calorimeter response

Resolution curve shows typical \sqrt{E} dependency

$$\frac{\Delta E_{\text{meas.}}}{E_{\text{meas.}}} = \left[\frac{16.6 \pm 0.1 (\text{stat.})}{\sqrt{E [\text{GeV}]}} \oplus (1.1 \pm 0.1) \right] \%$$

- Resolution well described by MC
- Confirms value used in LOI

Design emphasises spatial granularity over energy resolution


Calorimeter for Particle Flow

Exploiting the high granularity – Particle separation


High granularity allows for application of advanced imaging processing techniques

E.g. Hough transformation

Events recorded in test beam

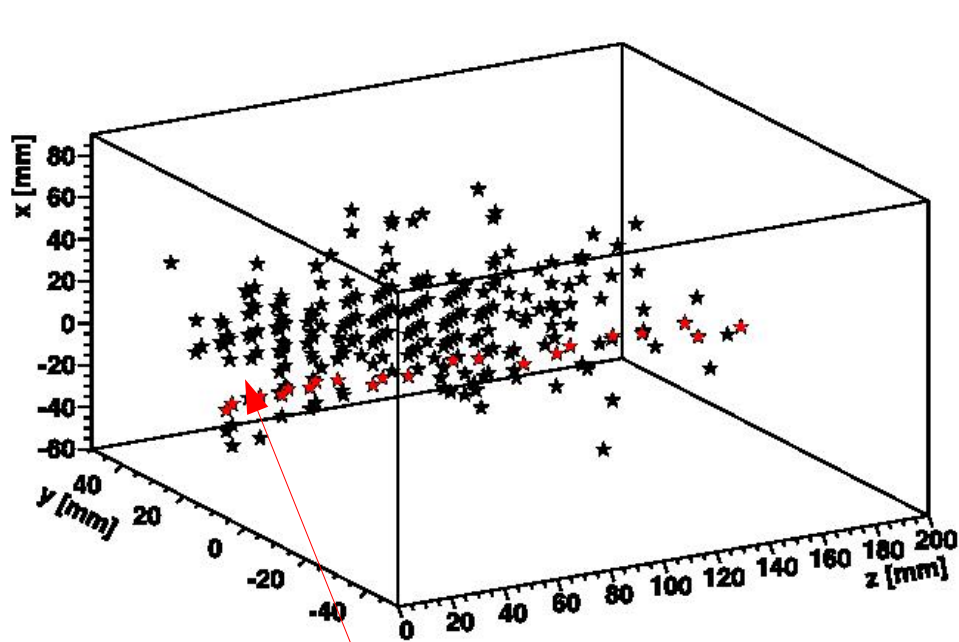

Secondary muon within
electron shower


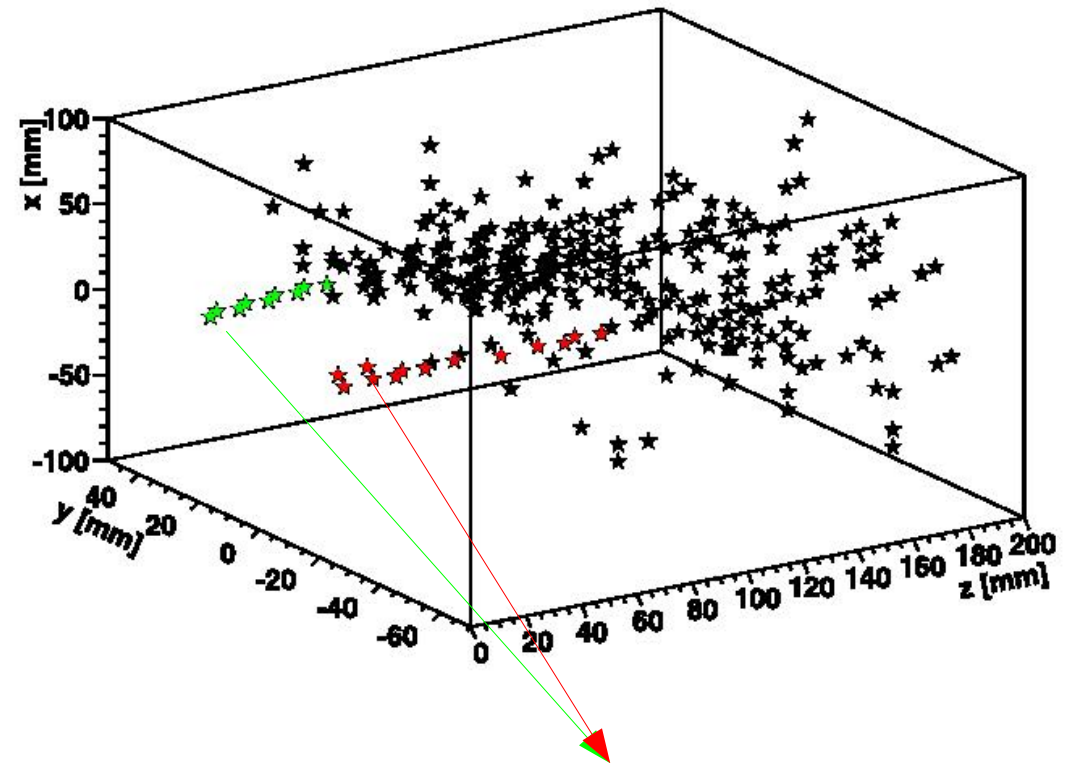


Two pions entering
the SiW Ecal

Particle separation – cont'd

Efficiency of particle separation

Separation MIP \leftrightarrow Electron

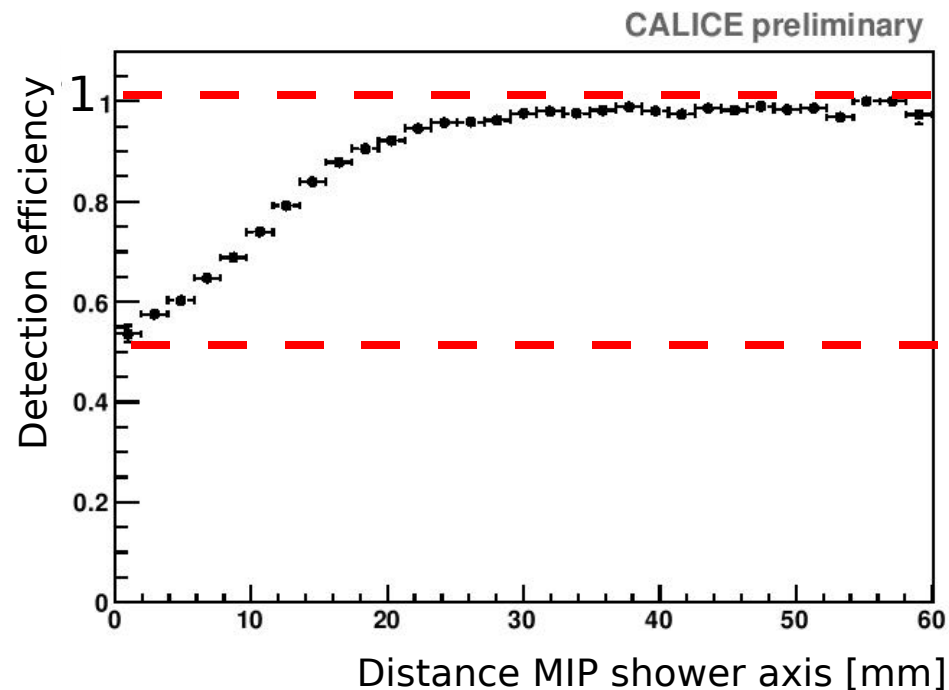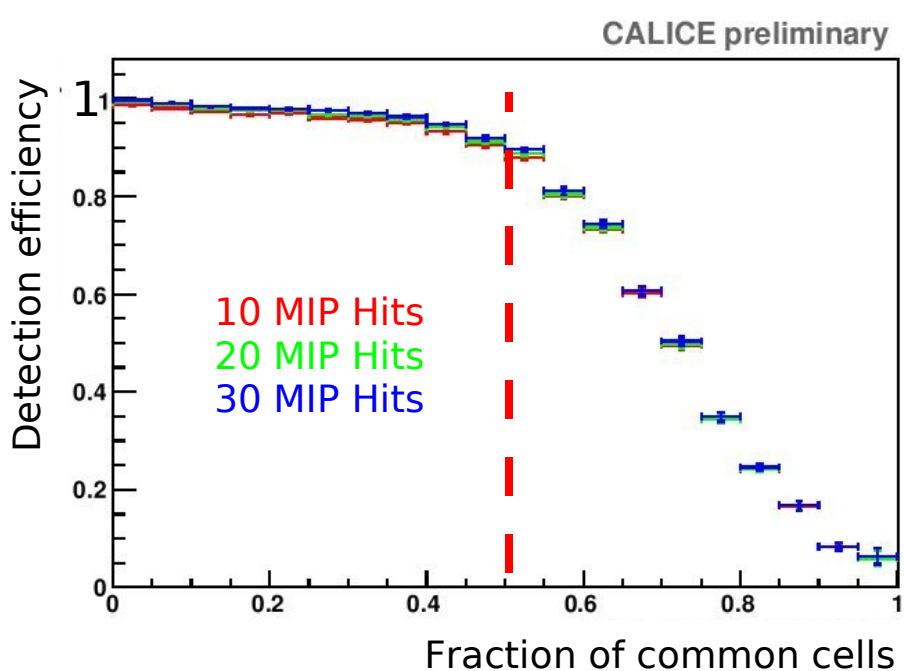

E \rightarrow 100% for up to 50% shared hits


Independent of hits generated
by MIP

Full separation for
distances > 2.5 cm

Granularity and hadronic cascades


(Start of) Hadronic showers in the SiW Ecal

Complex and impressive

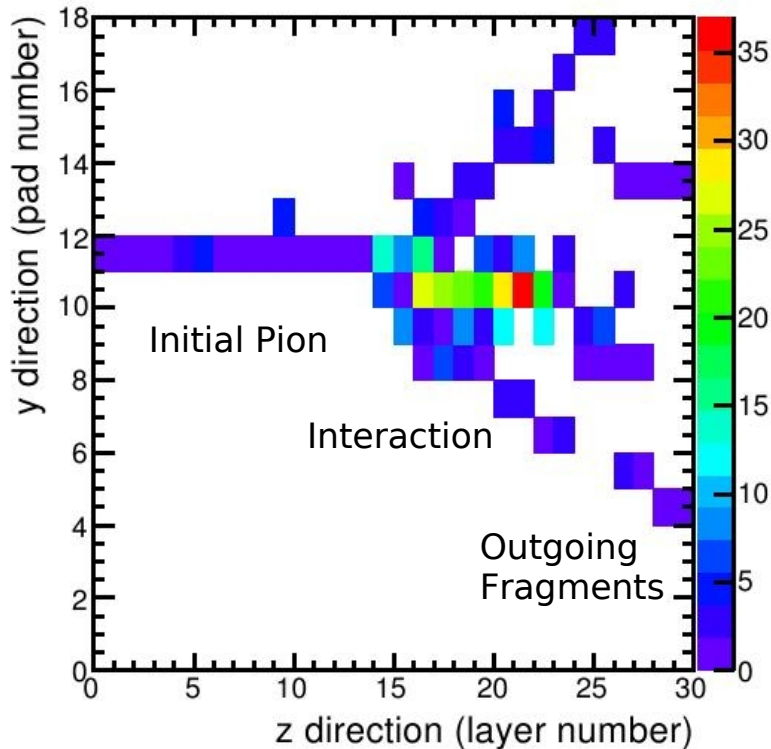

Inelastic reaction in SiW Ecal

Simple but nice

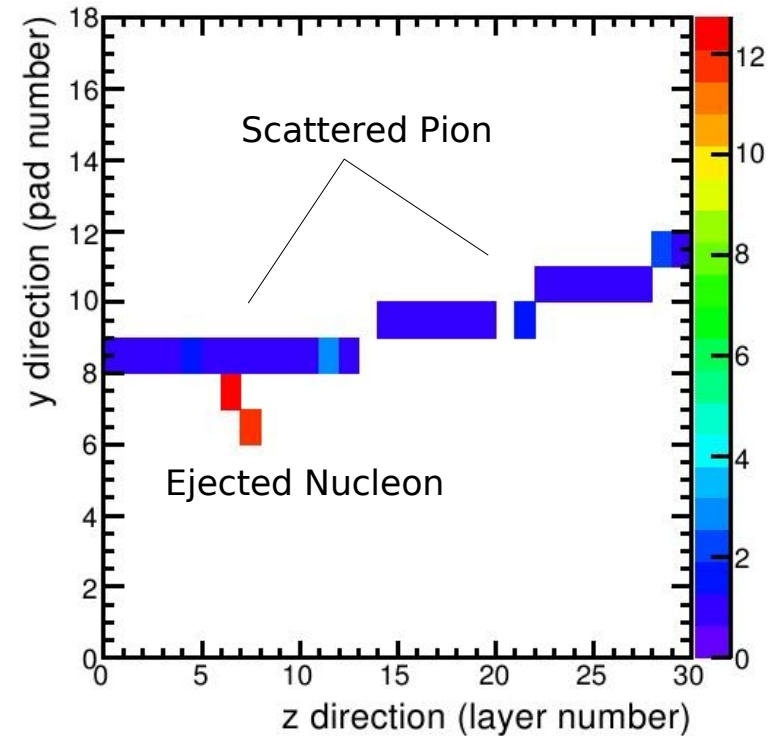


Nucleon ejection in SiW Ecal

High granularity permits detailed view into hadronic shower

Hadronic models in GEANT4

Variety of models available to describe hadronic showers

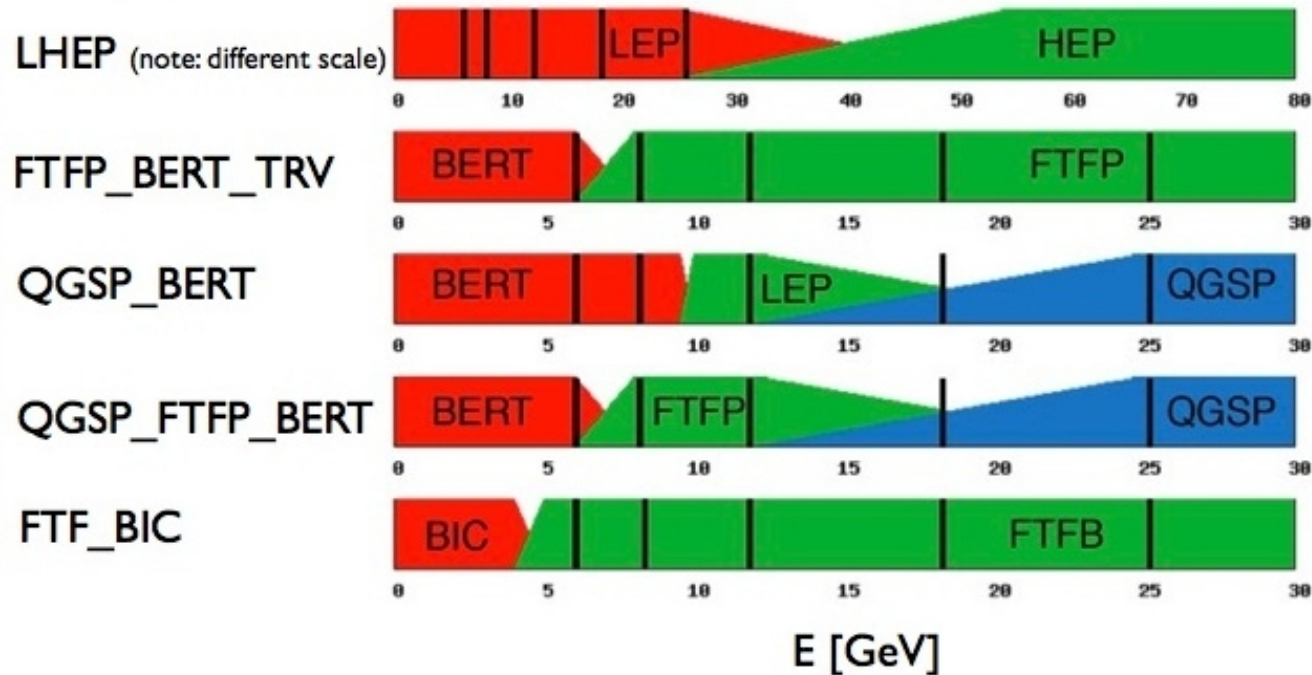


Discriminative power by high granularity !?

A. Dotti (G4 Collaboration): “Rough granularity of LHC calorimeters limits possibilities”
“CALICE is the perfect tool”


Finding the interaction in the SiW Ecal

Correlation:

True interaction \leftrightarrow Found interaction

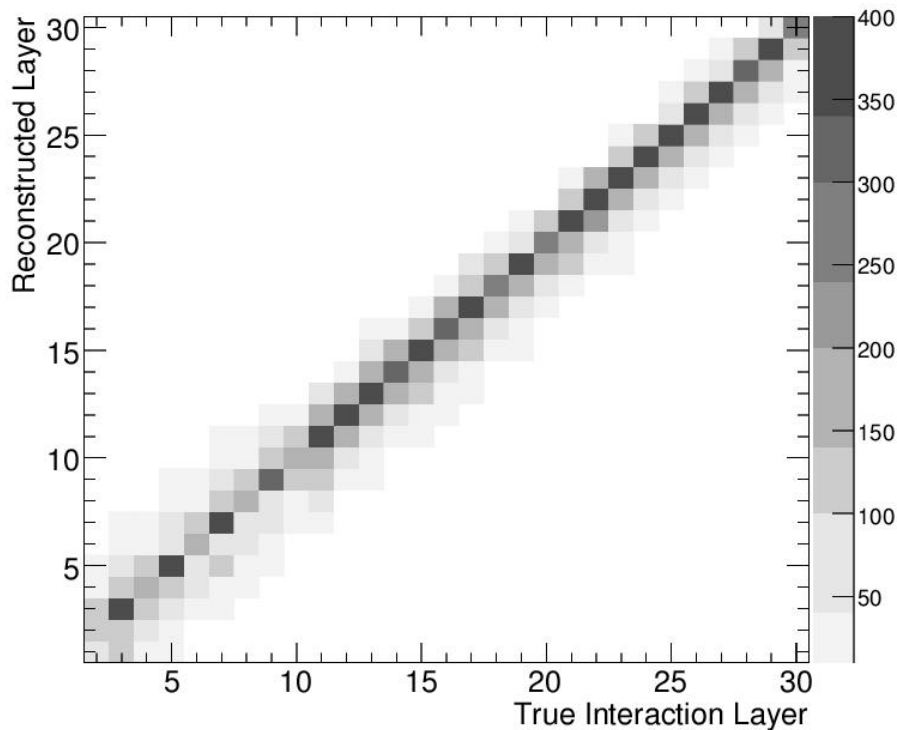

Distribution of found interaction layers

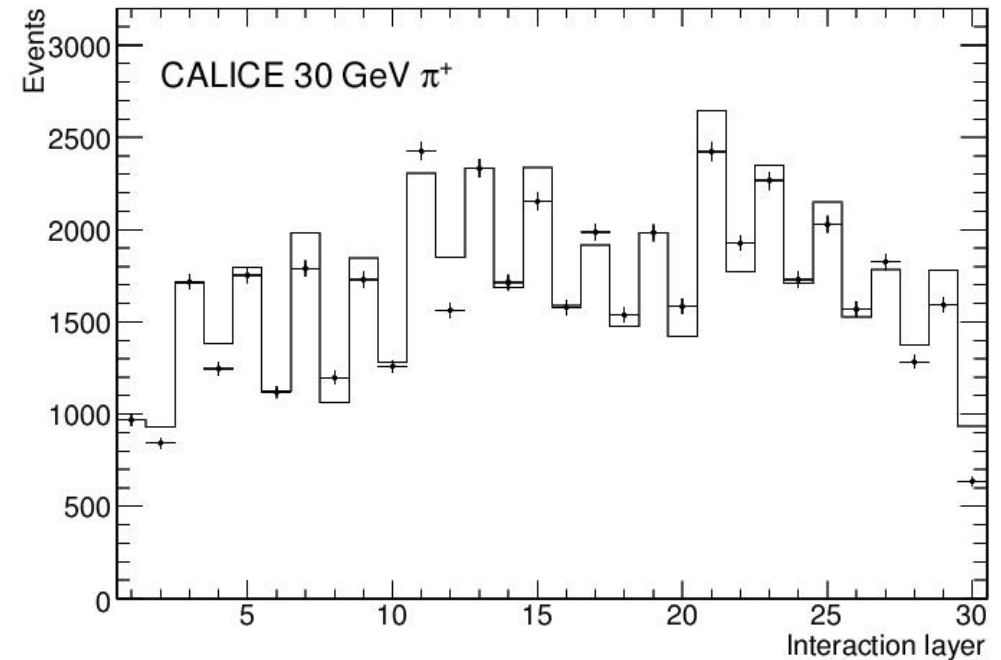

Determination precise to two layers
(Overall Layer thickness ~ 7 mm max.)



Good agreement between Data
and simulation (G4, here QGSP_BERT)

Granularity allow for resolving interaction layer with high resolution
High energy cross sections well implemented in G4 simulation



Transversal shower profiles and shower radius

Affects overlap of showers \leftrightarrow Importance for PFA

Transverse
profiles

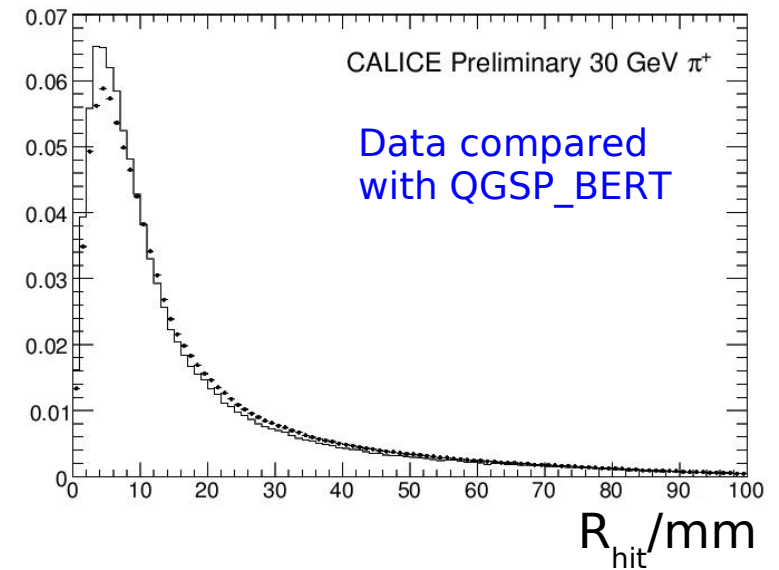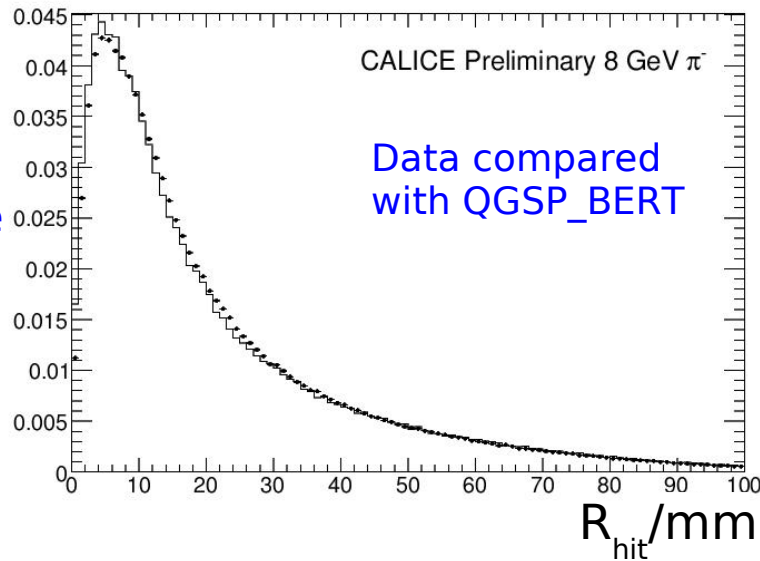


Shower
radius

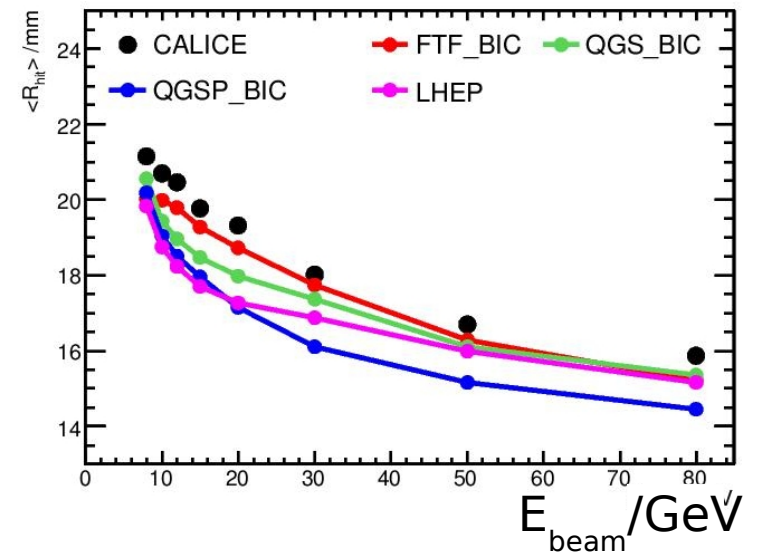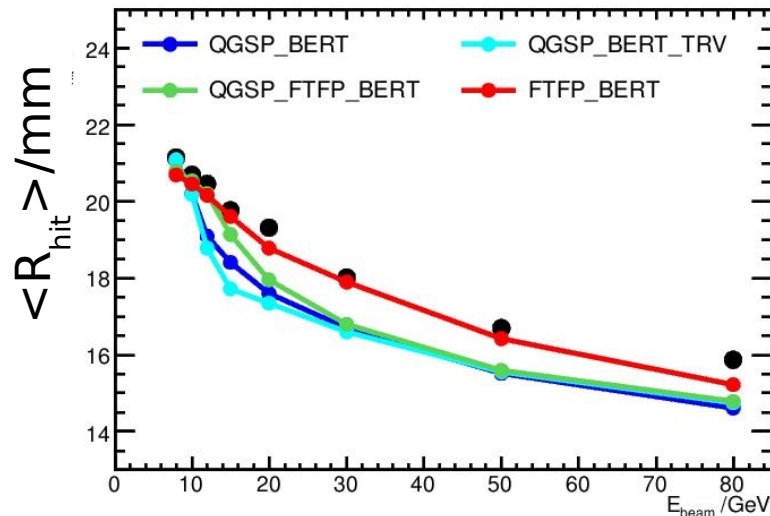

Small energy ok for 'BERT' models
Towards high energy: Underestimation of content in SiW Ecal
Relatively small difference between models ($\sim 15\%$)


Longitudinal energy profiles

Sensitivity to different shower components

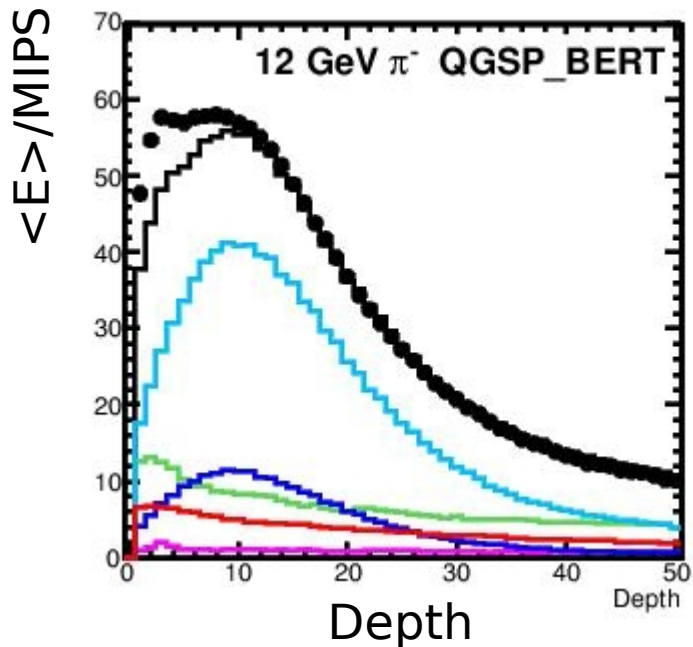

Shower components:

- electrons/positrons
knock-on, ionisation, etc.
- protons
from nuclear fragmentation
- mesons
- others
- sum

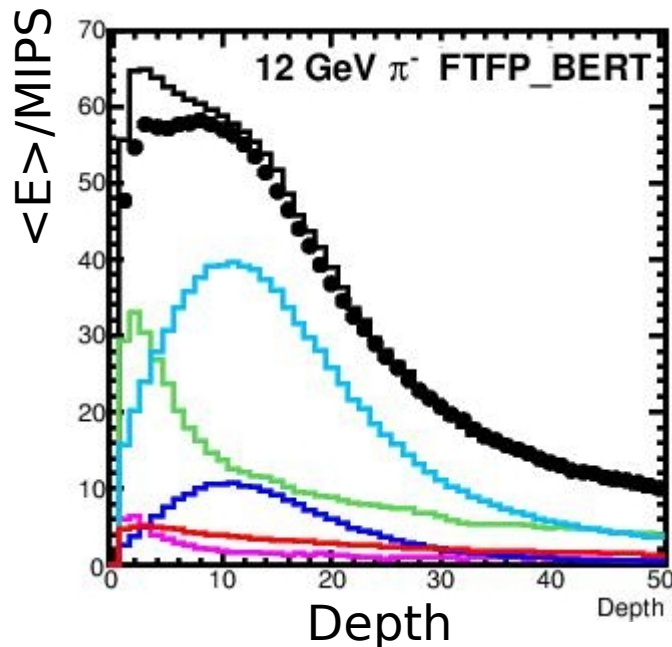

Significant difference between Models

- Particularly for short range component (protons)



Granularity of SiW Ecal allows (some) disentangling of components

Further studies for shower decomposition are ongoing

Energy depositions in different calorimeter depths



Layer 1-3:

Nuclear breakup

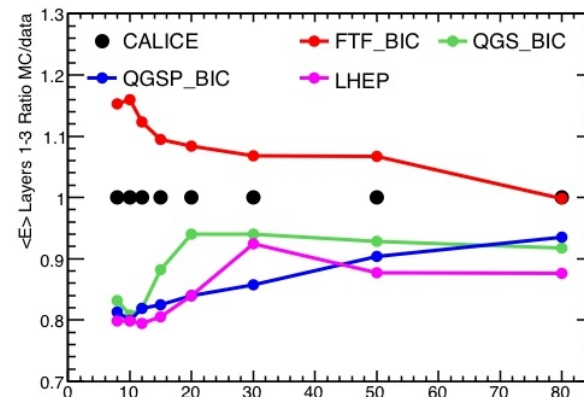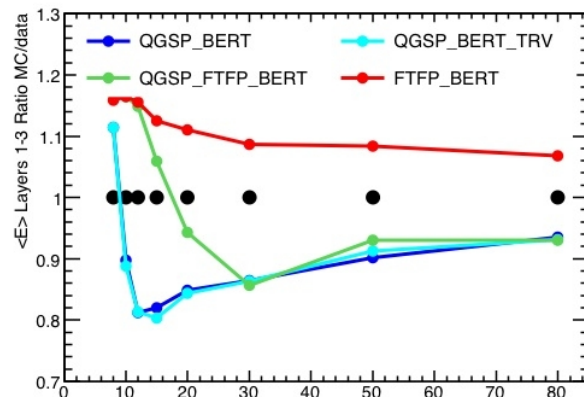



Layer 5-20:

elm. component

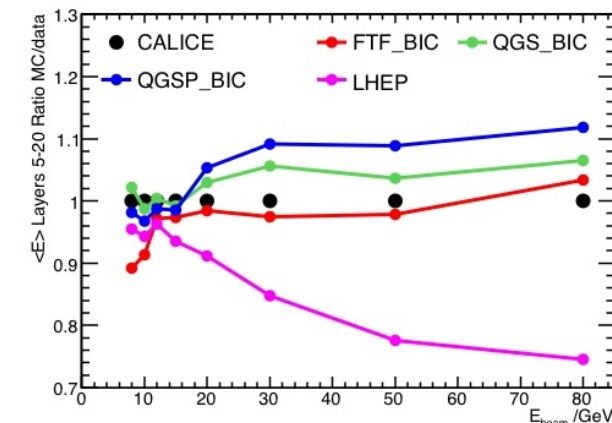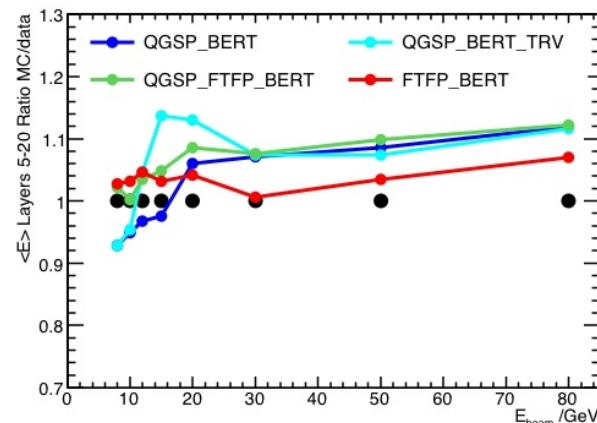


Layer 30-50:

Shower hadrons

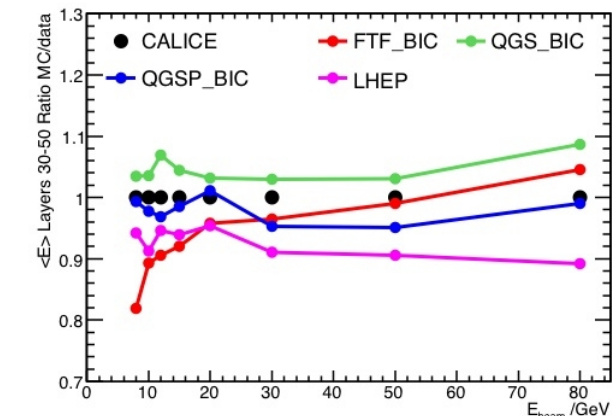
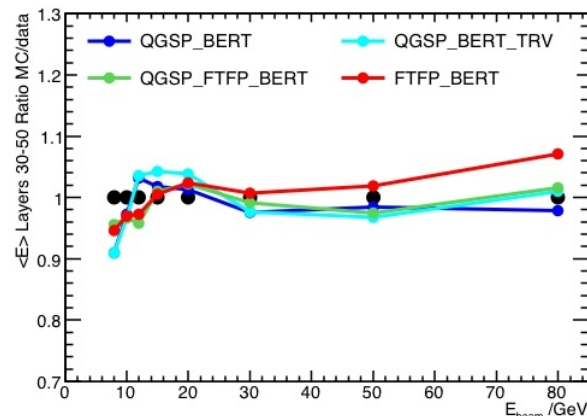


R&D for silicon wafers

Square pattern in wafer response

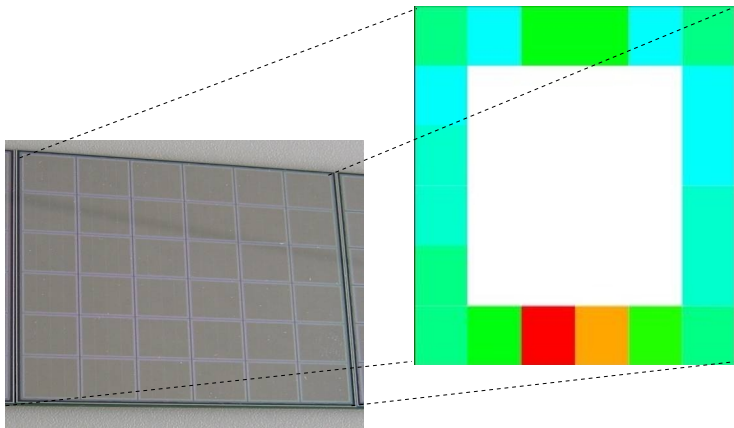

Segmented guarding

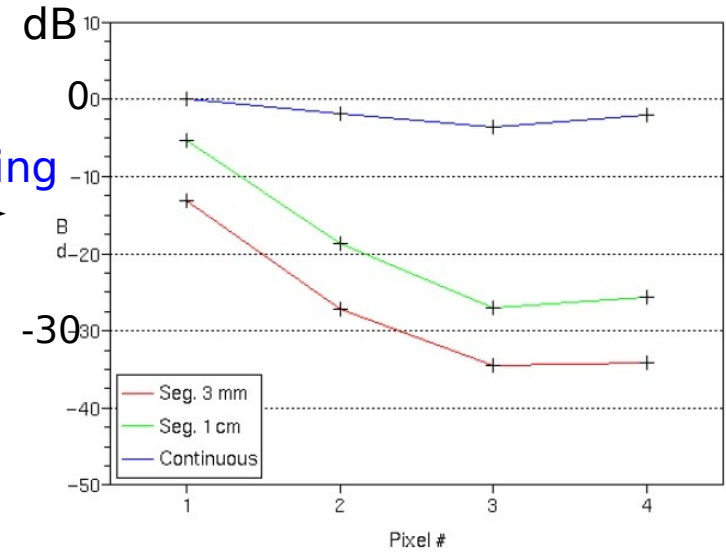


Xtalk continous guarding <-> Pixel

Attenuation of Xtalk

Beyond the physics prototype


Wafers with smaller pixels

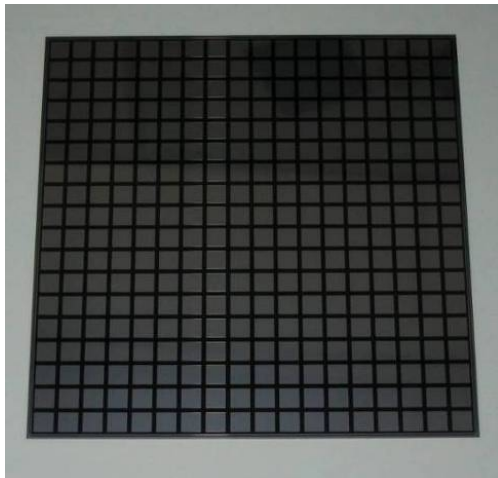

5x5 mm² pixels
~optimal "ILD width"

Thickness: 325 μm


Characterisation

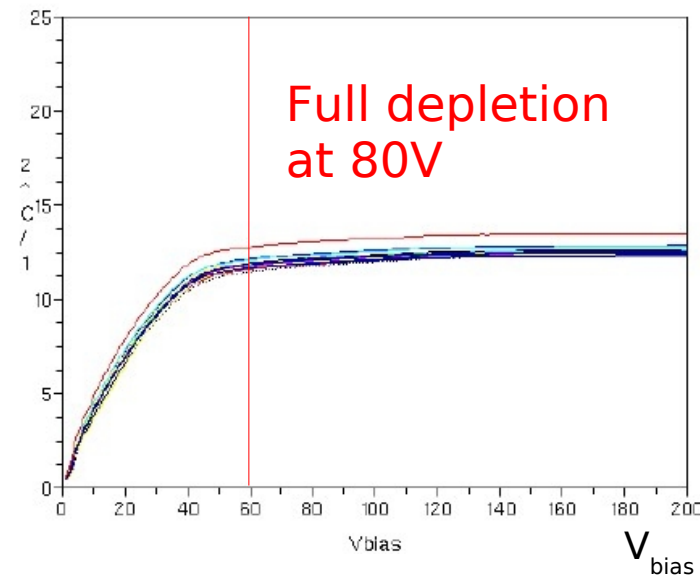

Breakdown
at ~500 V




Technological Prototype

Technical solutions for the/a final detector

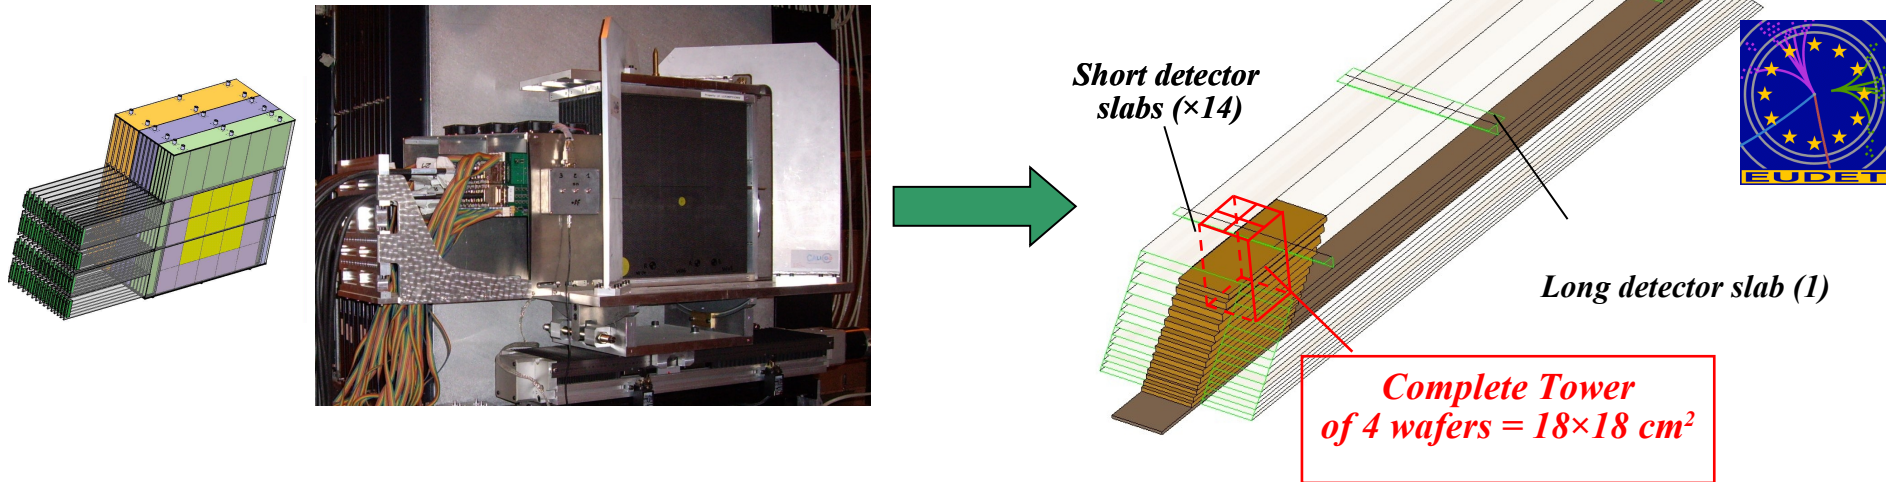

- Realistic dimensions
- Integrated front end electronics
- Small power consumption
Power pulsed electronics
- Construction 2010 – 2012, Testbeams 2012-2013

Technological Prototype – Design

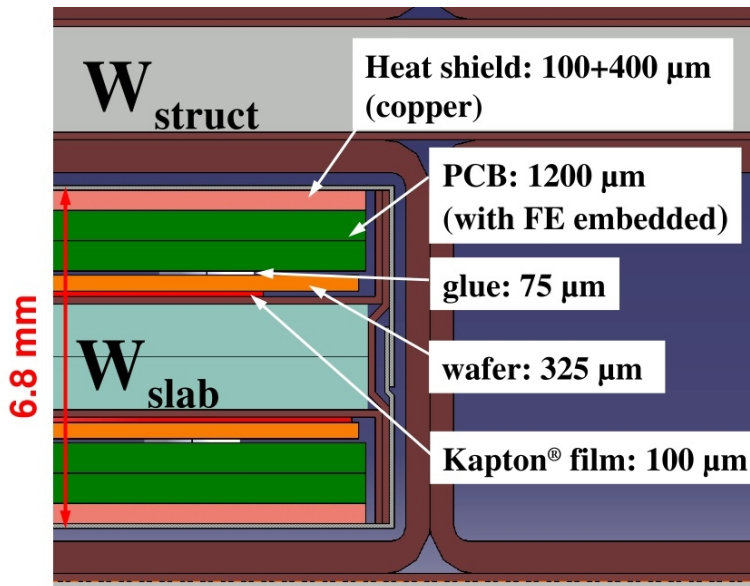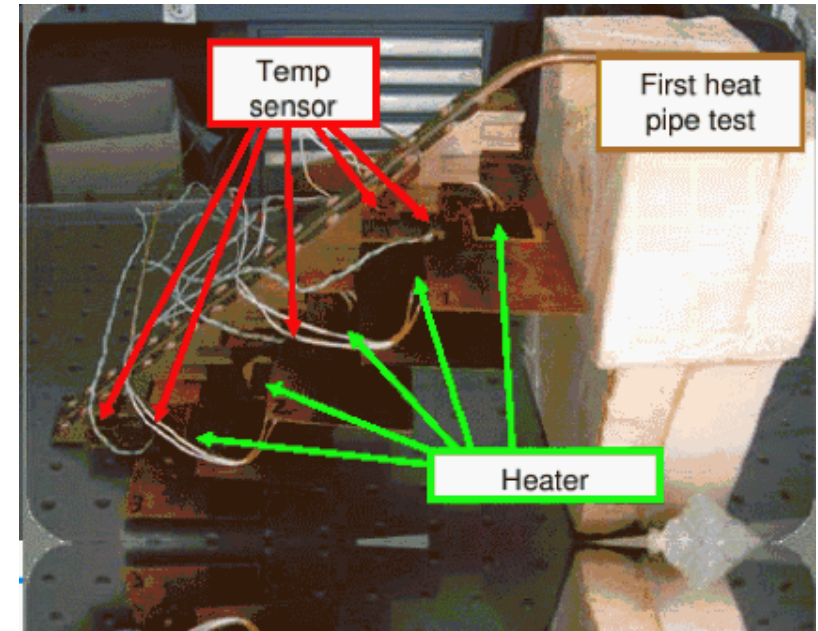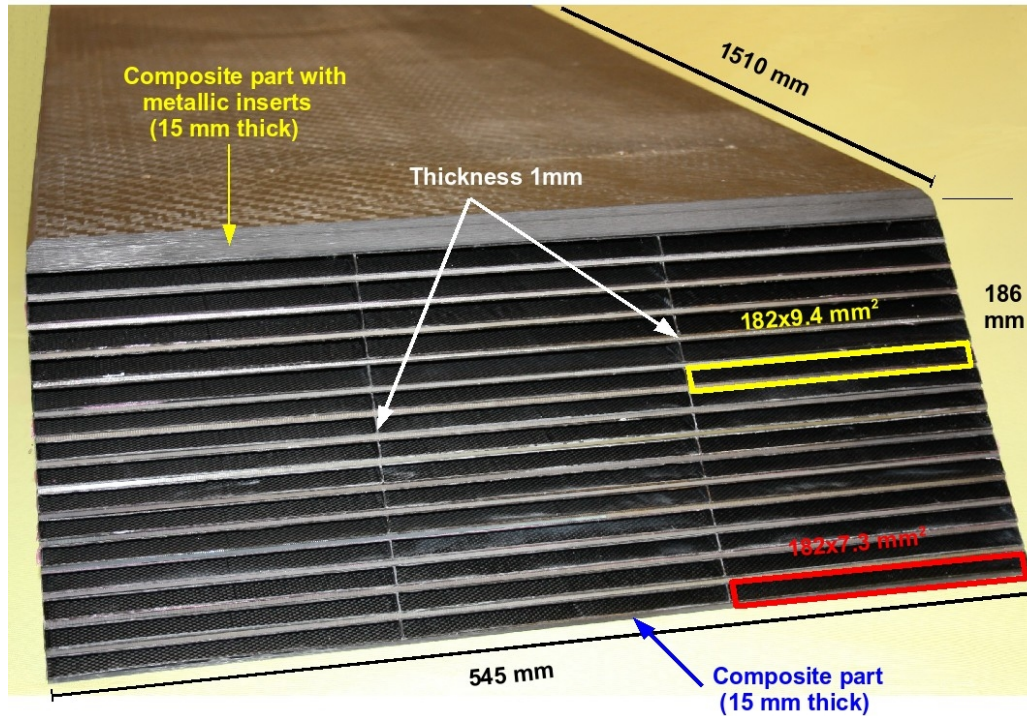

- ⇒ Gaps (slab integration) : 500 μm
- ⇒ Heat Shield: 500 μm
- ⇒ PCB : ~1200 μm
- ⇒ Thickness of Glue : 100 μm
- ⇒ Thickness of SiWafer : 325 μm
- ⇒ Kapton[®] film HV : 100 μm
- ⇒ Thickness of W : 2100/4200 μm ($\pm 80 \mu m$)



Ecal detector layer - Principle

A layer is composed of several **short ASUs**:


- A.S.U. : **A**ctive **S**ensors **U**nits

**Chip+PCB+SiWafer
=ASU**


PCB
is glued
onto
SiWafers

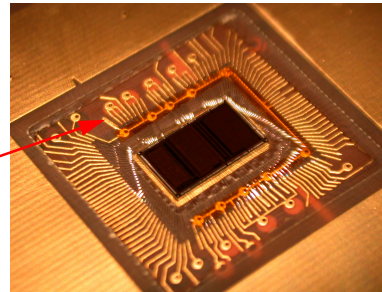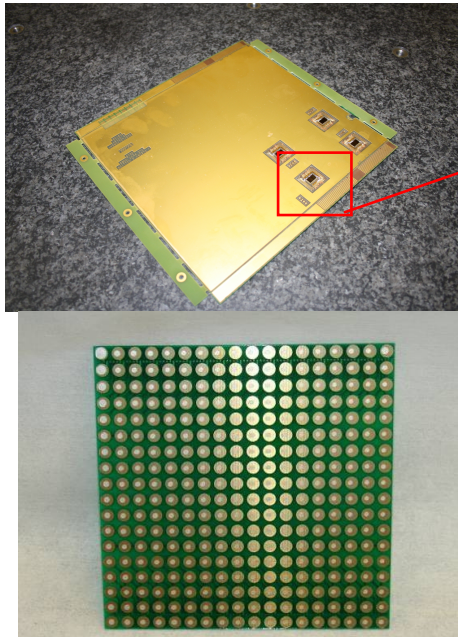

Chip embedded

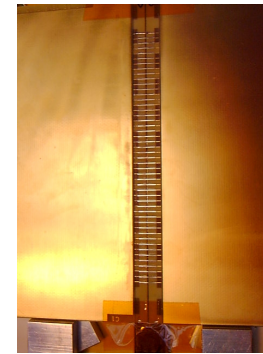

Interconnection
by FFC
("Flat Flexible Cable")

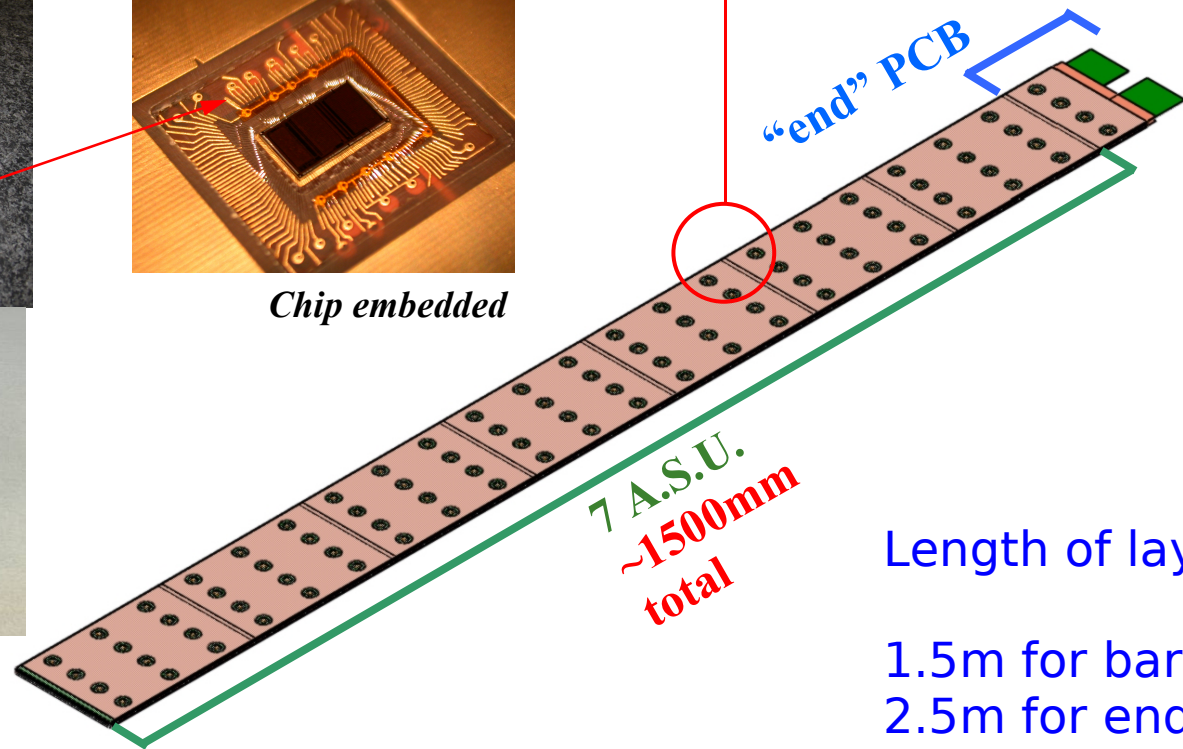



Length of layer:

1.5m for barrel
2.5m for endcaps


Front end electronics

Omega


- Requirements to electronics
 - Large dynamic range (~ 2500 MIPS)
 - **Front end electronics embedded**
 - Autotrigger at $\frac{1}{2}$ MIP
 - On chip zero suppression
- **Ultra low power ($\ll 25\mu\text{W}/\text{ch}$)**
- 10^8 channels
- Compactness

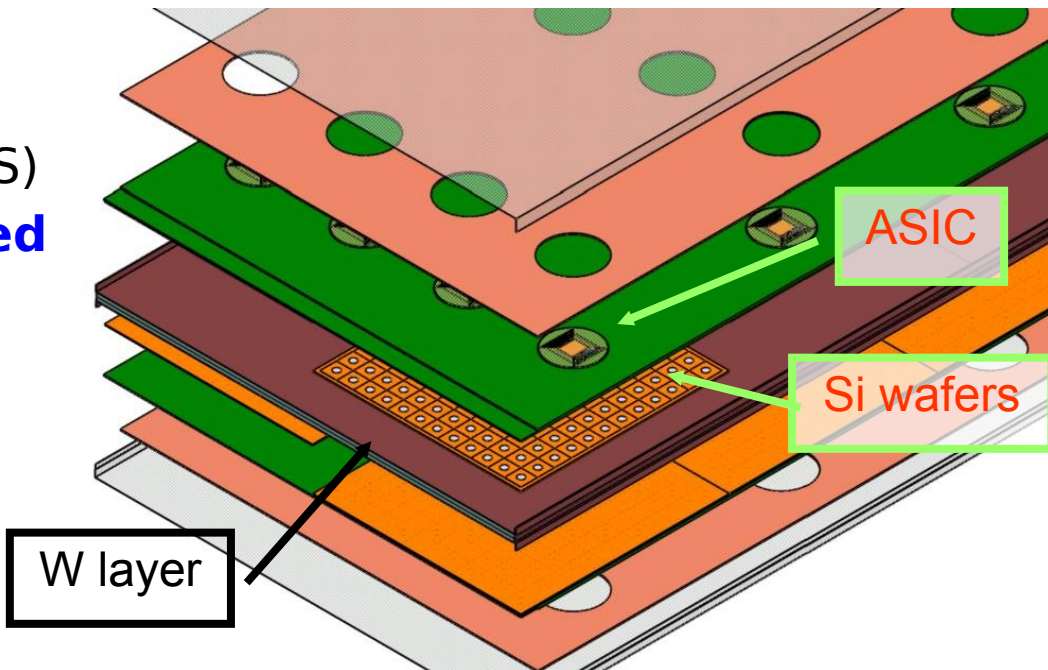

ILC : **$25\mu\text{W}/\text{ch}$**

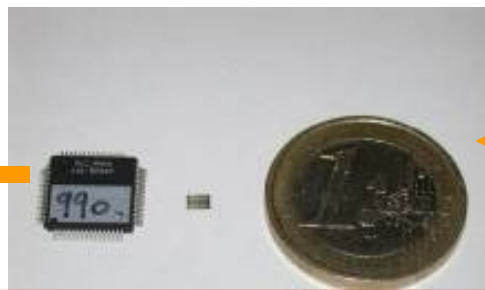



FLC_PHY3 18ch 10*10mm **$5\text{mW}/\text{ch}$**

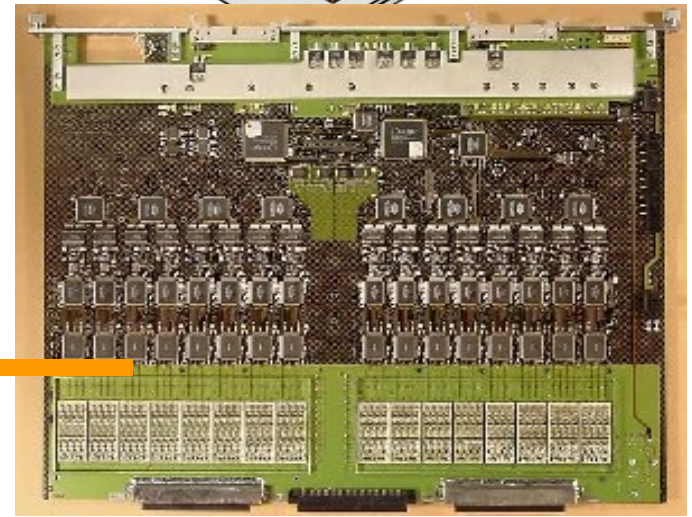


ATLAS LAr FEB 128ch 400*500mm **$1\text{ W}/\text{ch}$**

Embedded electronics - Parasitic effects?

Exposure of front end electronics to electromagnetic showers

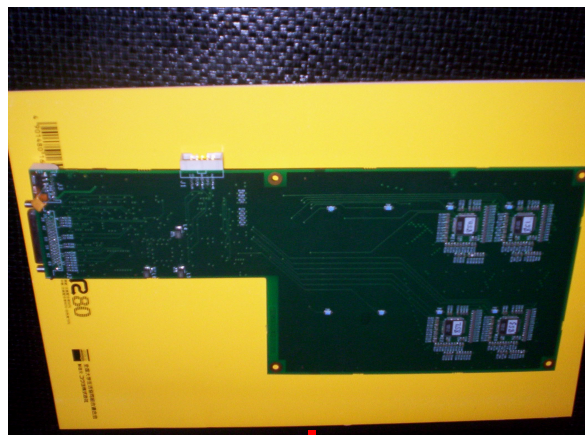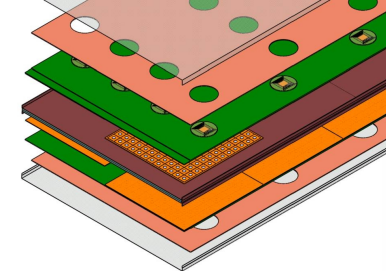


Chips placed in shower maximum of 70-90 GeV elm. showers

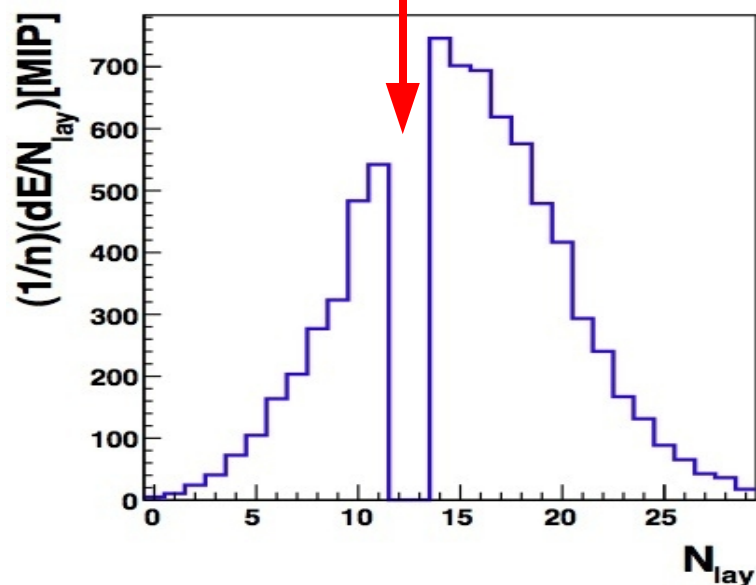

Possible Effects: Transient effects
Single event upsets


Comparison: **Beam events**
(Interleaved) Pedestal events

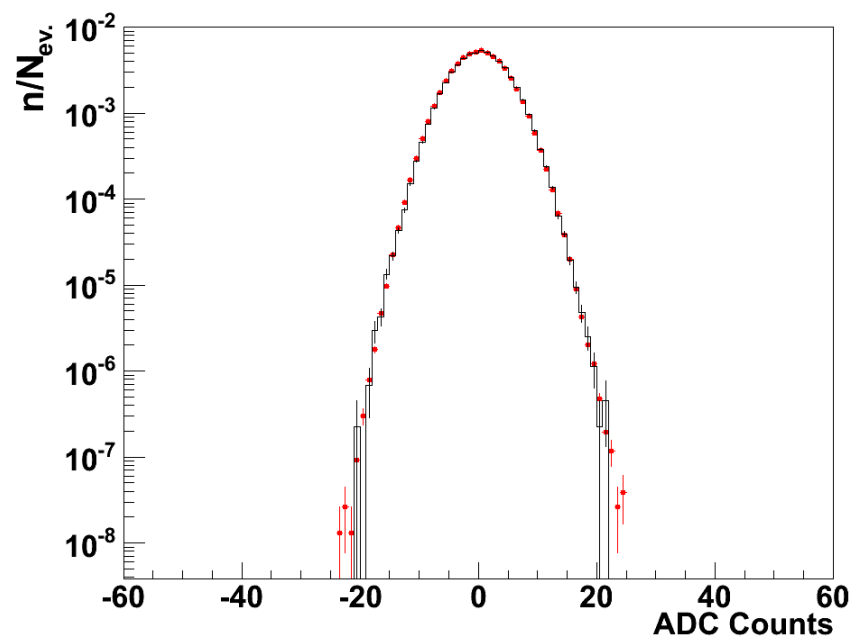


- No sizable influence on noise spectra by beam exposure
- $\Delta \text{Mean} < 0.01\%$ of MIP $\Delta \text{RMS} < 0.01\%$ of MIP
- No hit above 1 MIP observed
- => Upper Limit on rate of faked MIPs: $\sim 7 \times 10^{-7}$

Detailed noise analysis

Coherent noise

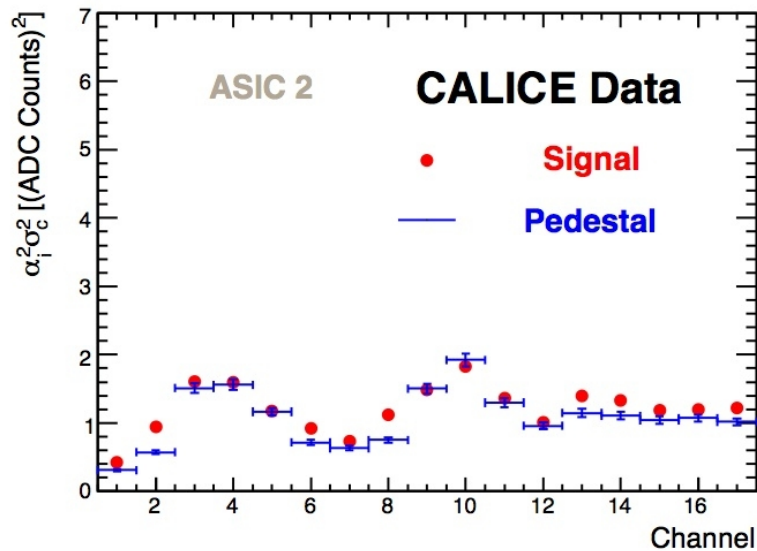


Incoherent noise

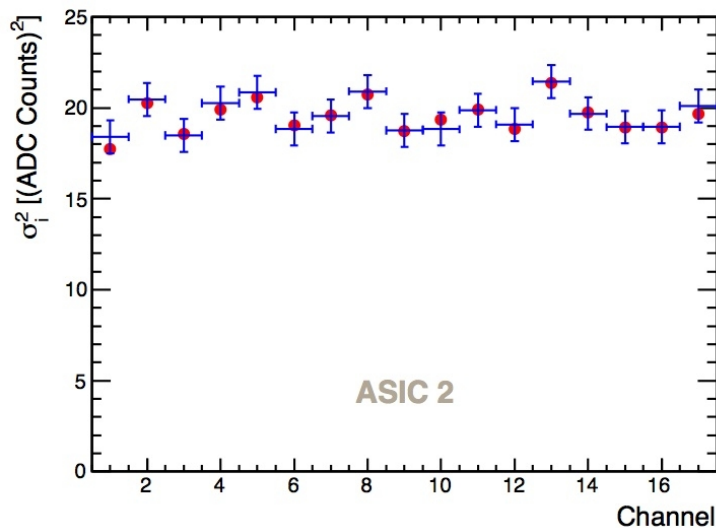

Noise pattern unchanged by shower particles

Upper limits on parasitic hits – 95% CL

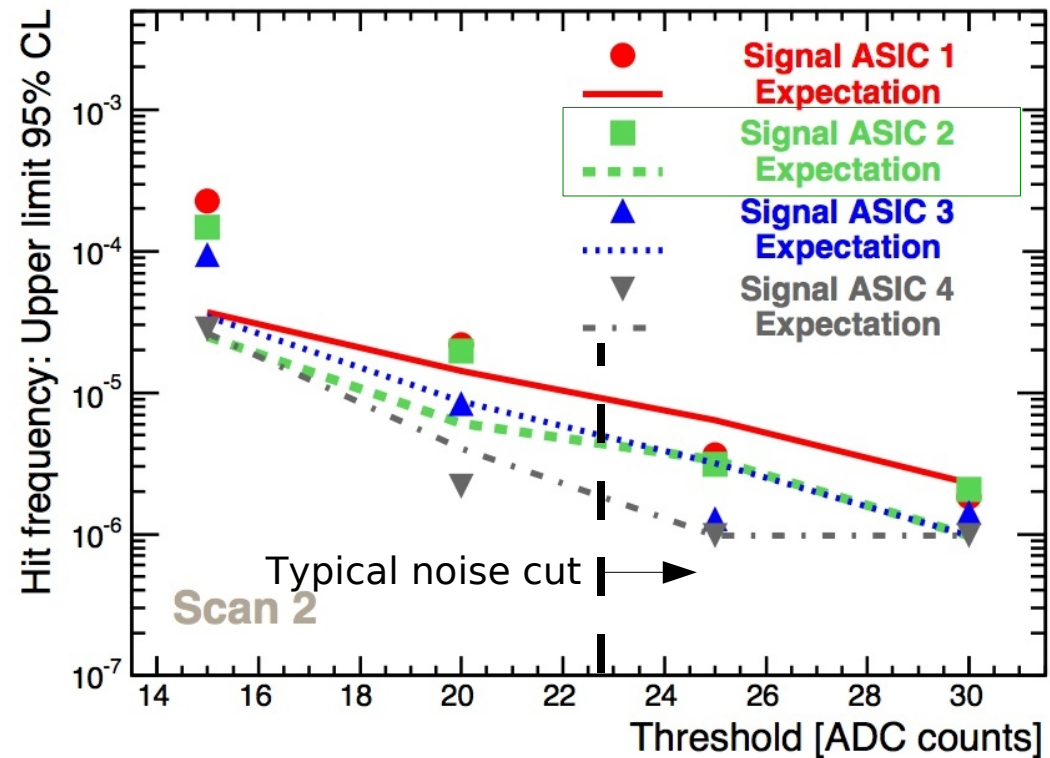


Chip in beam

- Frequency of parasitic hits comparable to regular electronics noise
- $< 10^{-5}$ above typical noise cut


Compare with 2500 cells in typical ee- \rightarrow tt event

The Ecal ASIC - SKIROC


- 64 Channels
- Vss split :
 - Inputs
 - Analogue part
 - Mixed part
 - Digital part
- 250 pads
 - 3 NC
 - 17 for test purpose only
- Enhanced Power control
 - Full power pulsing capability
 - Each stage can be forced ON OFF
- Die size
 - 7229 μm x 8650 μm

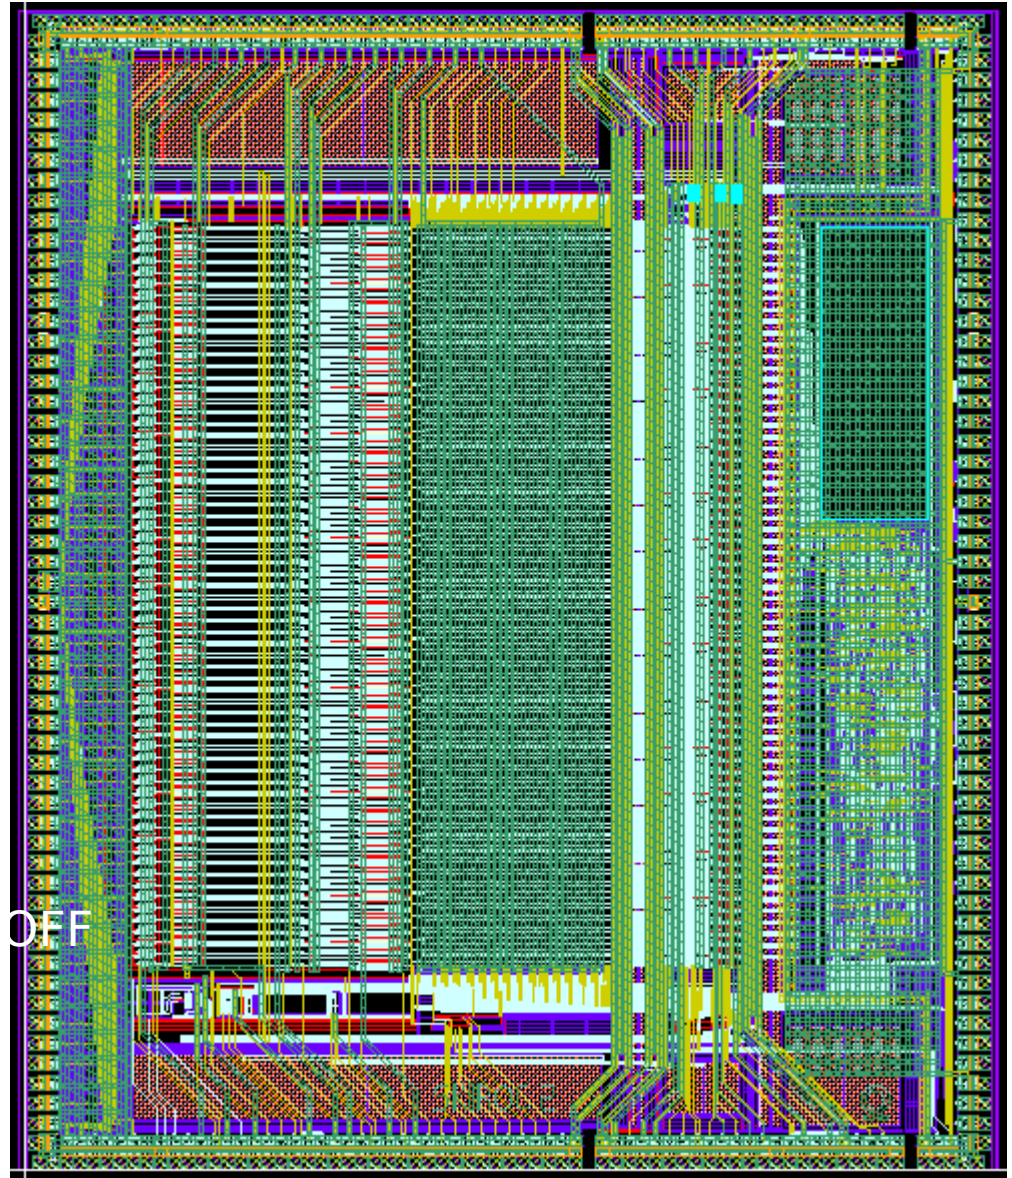

SKIROC 2 block scheme

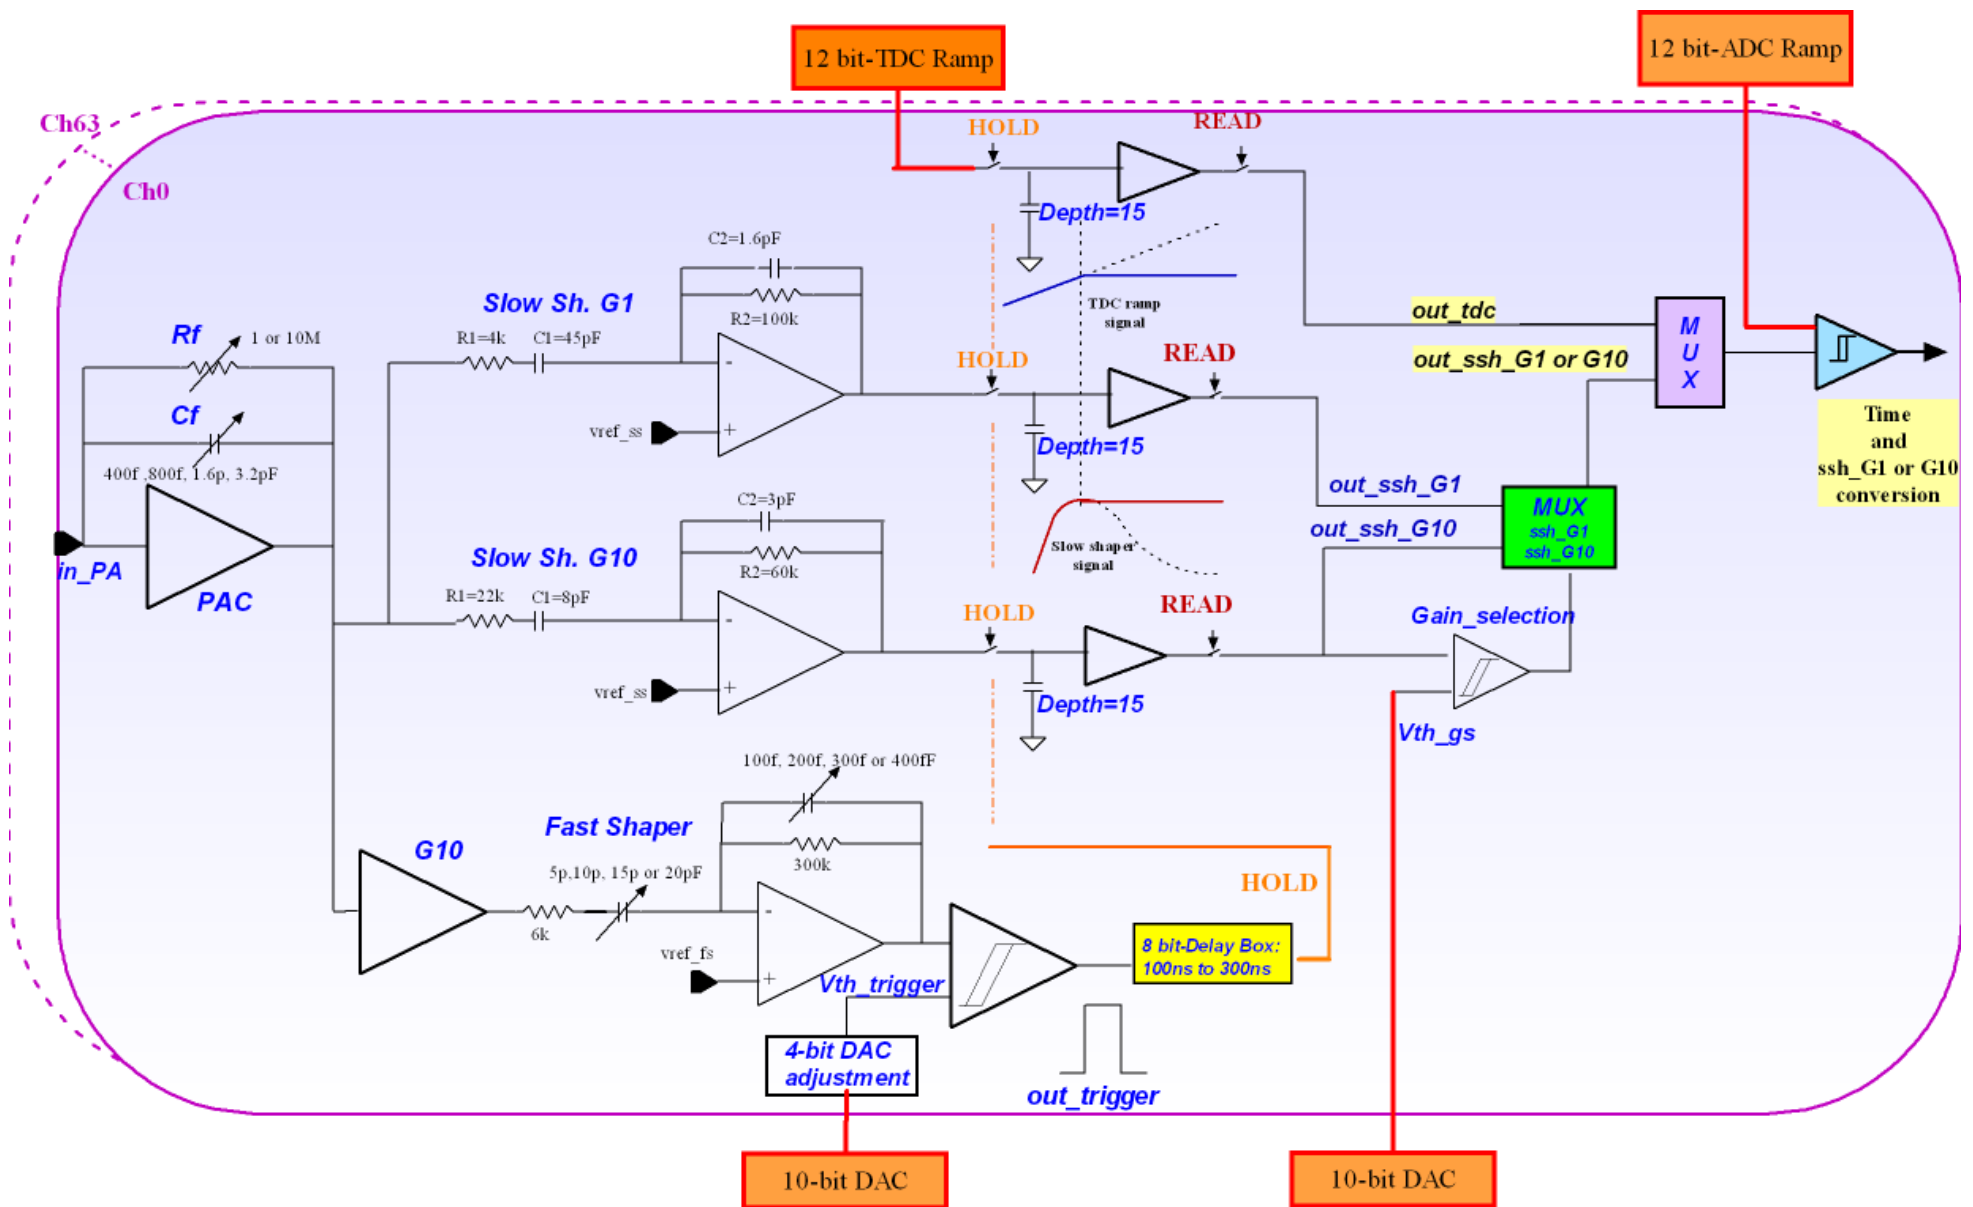

Power pulsing (better power gating)

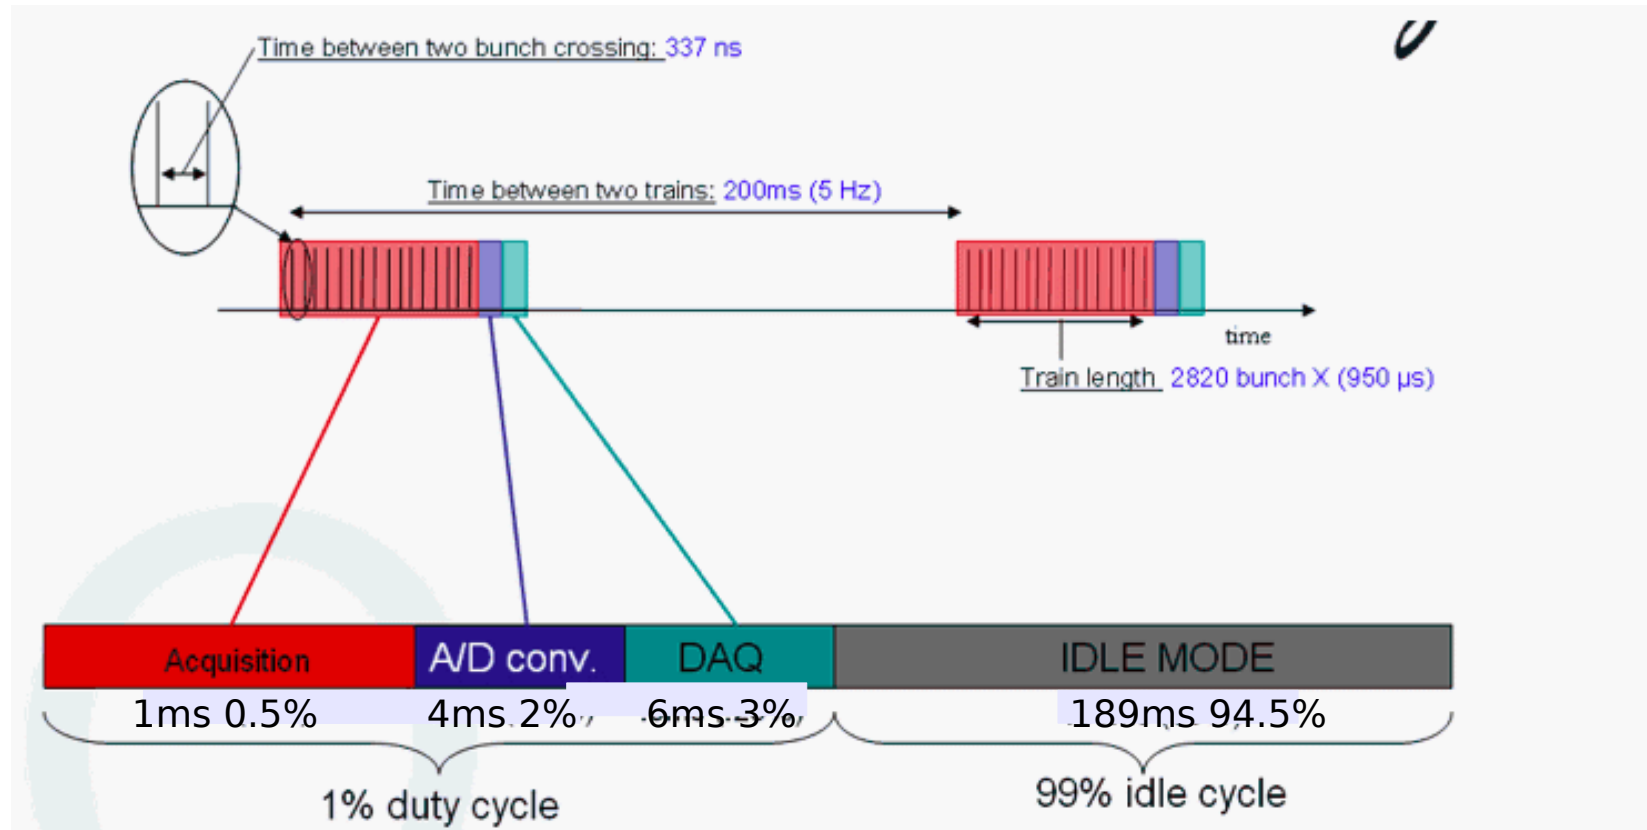

- Electronics switched on during 1ms of ILC bunch train and immediate data acquisition
- Bias currents shut down between bunch trains
- **Mastering of technology is essential for operation of ILC detectors**
Encouraging results by IPNL group with similar chip

Summary and outlook

- Successful R&D for a highly granular electromagnetic calorimeter
- Detector concept is built on Particle Flow

Physics Prototype (2005-2009):



- Energy resolution $\sim 17\%/\sqrt{E}$
- Signal to Noise Ratio $\sim 8/1$
- Stable calibration

Technological Prototype (2010-...):

- Mechanical concept validated
- Silicon Wafer technology at hand
- Front End Electronics will be challenging
Embedded into calorimeter layers, power gating
- Supported within EUDET (2006-2010) and AIDA (2011-2015)
- Capacity of separating particles impressively demonstrated
by test beam analysis
- Unprecedented realistic views into hadronic showers
thanks to high granularity
'Modern bubble chamber'
- Coping with vast amount of information is challenging
The harvest is just starting


Backup Slides

A generic DAQ system for the CALICE calorimeters (Technological Prototypes)

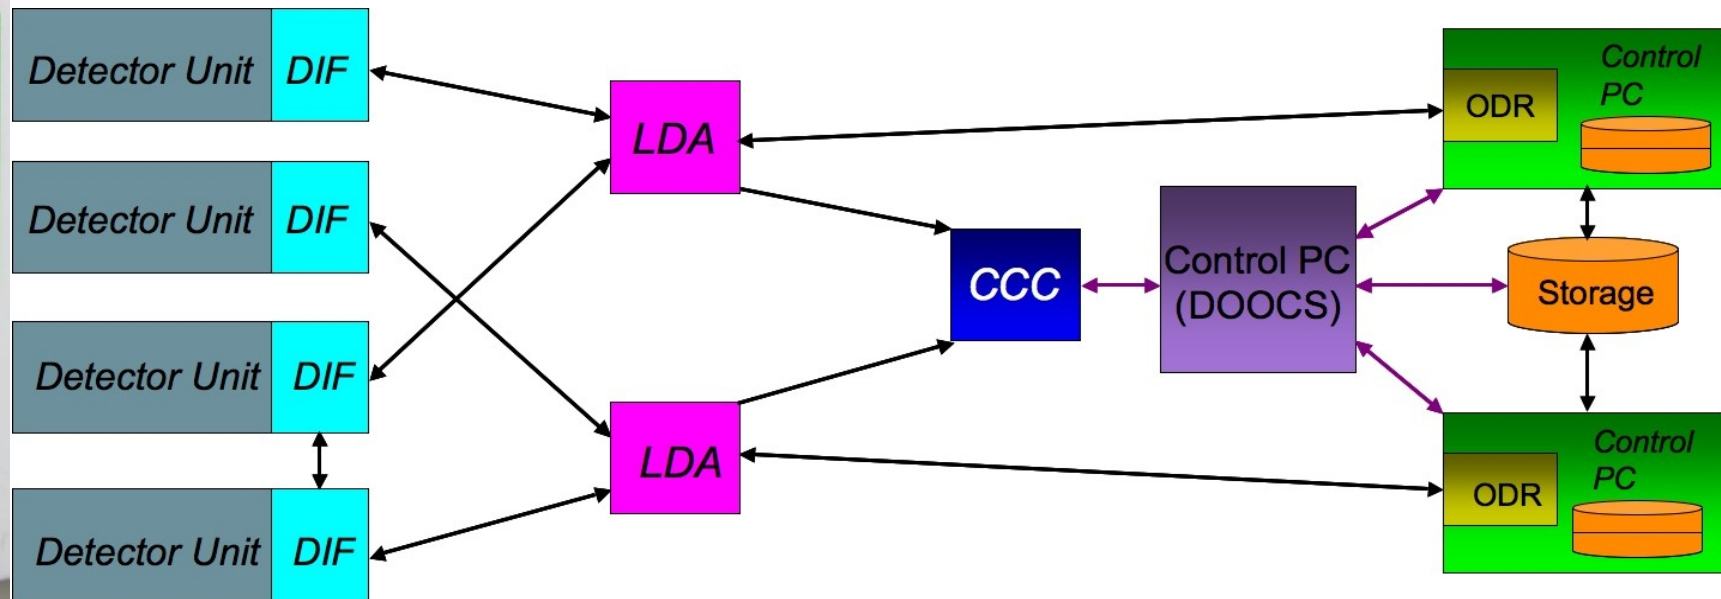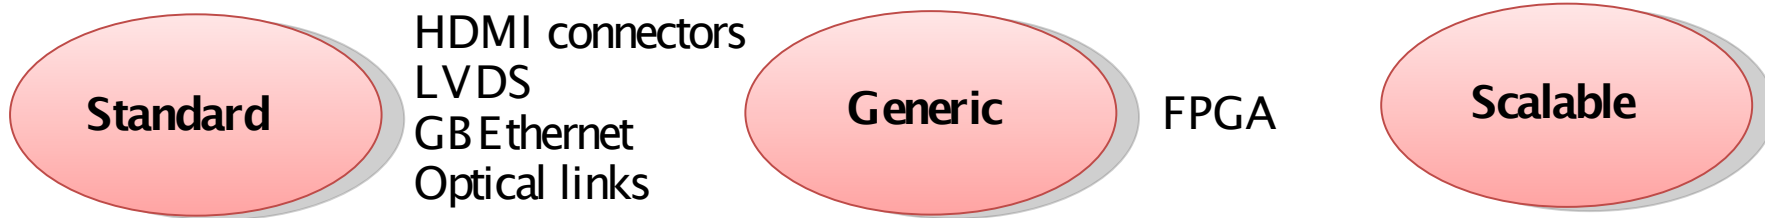

The International Linear Collider ILC

Linear Electron-Positron Collider

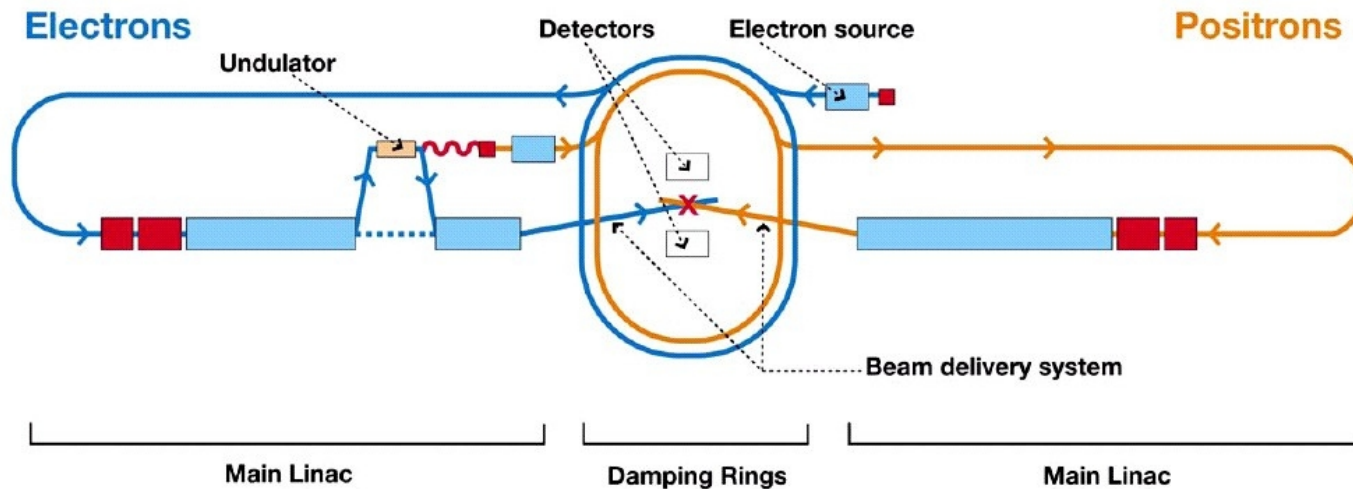

Total Footprint 31 km



Technology for Main Linac

Superconductive RF cavity

ITRP Recommendation 2004

Main parameters

- \sqrt{s} adjustable from 200 – 500 GeV
- Luminosity $\rightarrow \int L dt = 500 \text{ fb}^{-1}$ in 4 years
- Ability to scan between 200 and 500 GeV
- Energy stability and precision below 0.1%
- Electron polarisation of at least 80%
Option: Polarised Positrons
- The machine must be upgradeable to 1 TeV

Present outlook


- Technical design report 2012
- R&D Project for higher Energies CLIC

Stability of calibration?

Important Criterium during evaluation process of detector concepts

Affects both: precision and operability of detector: $\sim 10^8$ calo cells in LC Detector

Calibration Constants on testbench and in beam test campaign

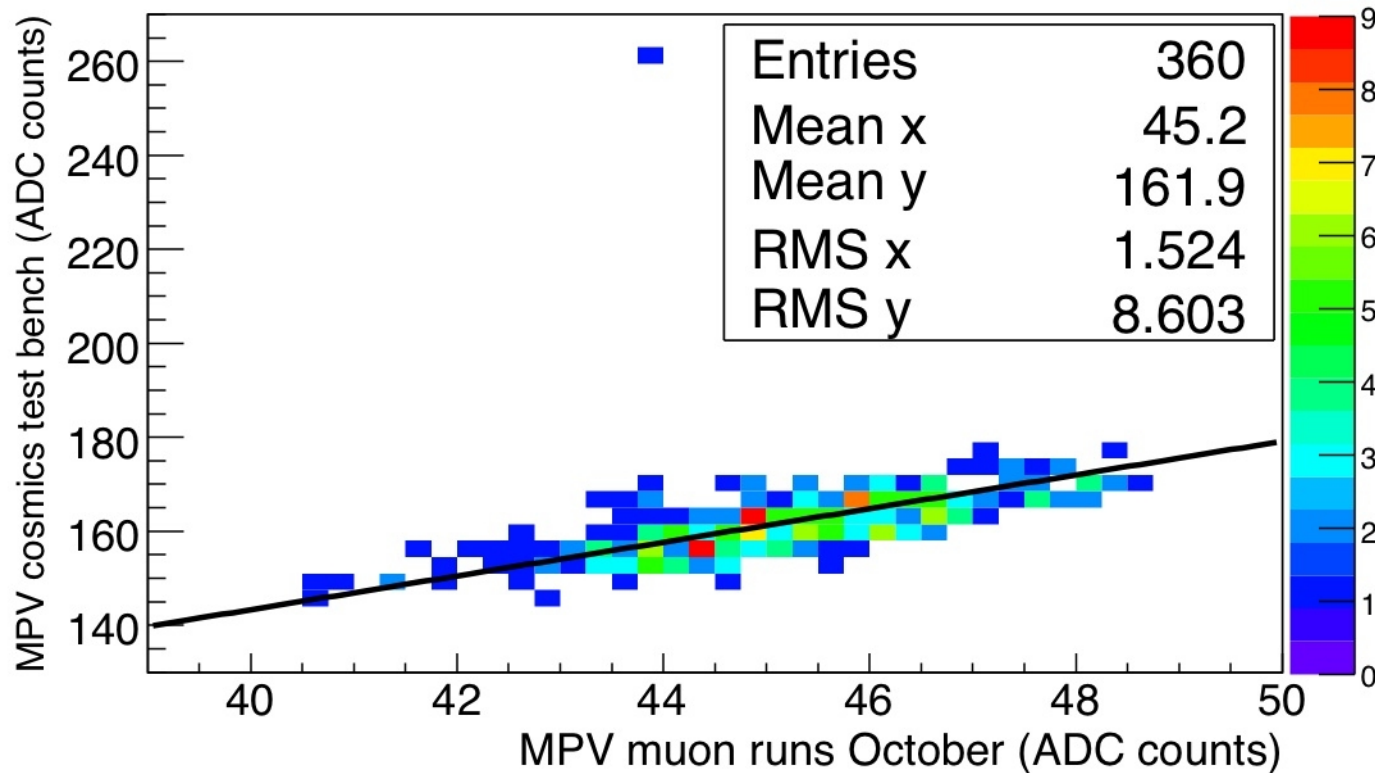


High Correlation between calibration constants

For “final” detector:

Detector modules can be calibrated in beam test prior to installation

Angular resolution

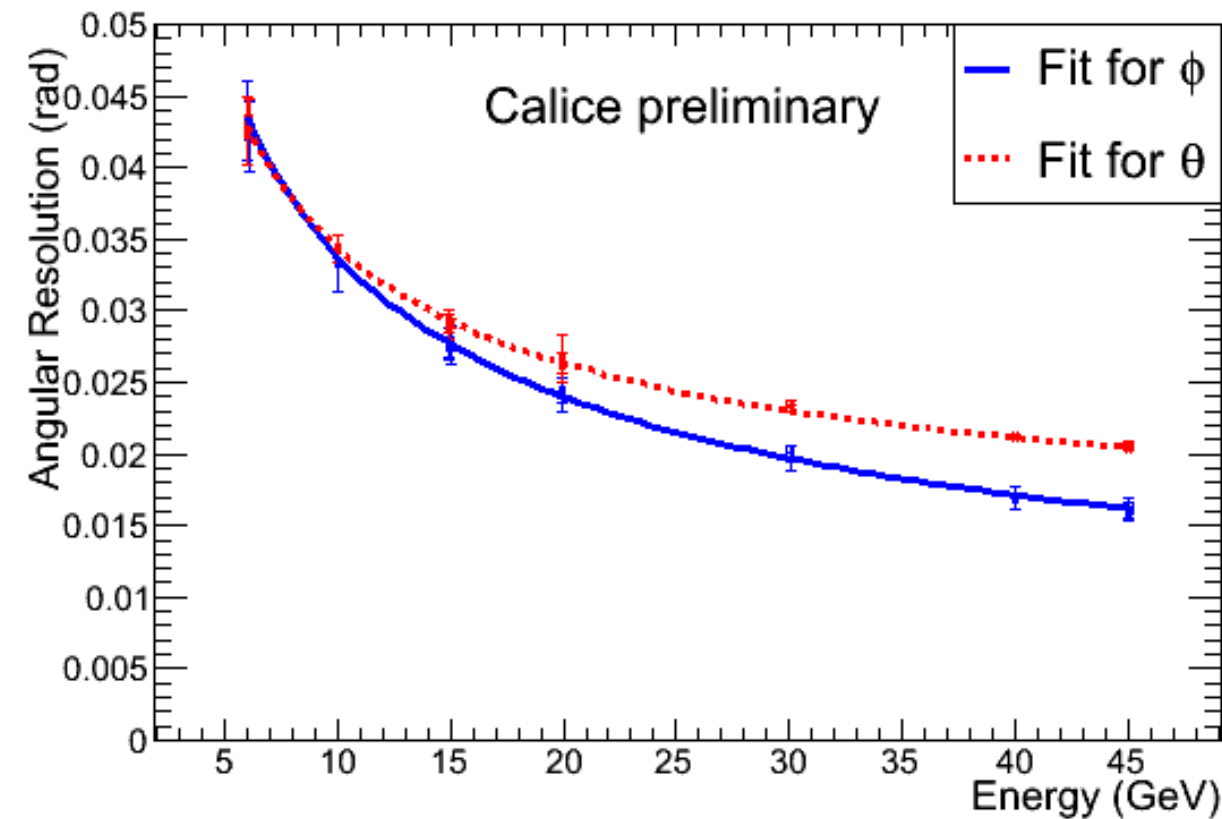

Fitted with:

$$\frac{p1}{\sqrt{E(GeV)}} \oplus p0$$

ϕ , angle respect to X:

$$\left(\frac{106 \pm 2}{\sqrt{E(GeV)}} \oplus (4 \pm 1) \right) mrad$$



θ , angle respect to Y:

$$\left(\frac{100 \pm 2}{\sqrt{E(GeV)}} \oplus (14 \pm 1) \right) mrad$$


Differences due X and Y due to geometrical properties of prototype (staggering)

Technological Prototype

- Physics prototype: Validation of main concept
- Techno. Proto : Study and validation of **technological solutions** for final detector
- Taking into account **industrialisation aspect** of process
- First **cost** estimation of one module


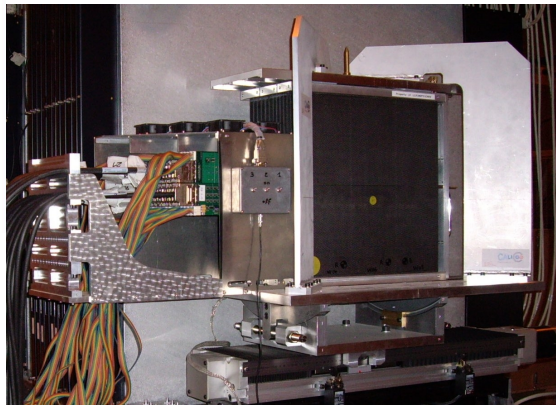



- **3 structures : $24 X_0$**
($10 \times 1,4\text{mm} + 10 \times 2,8\text{mm} + 10 \times 4,2\text{mm}$)
- **sizes : $380 \times 380 \times 200 \text{ mm}^3$**
- **Thickness of slabs : 8.3 mm**
($W=1,4\text{mm}$)
- **VFE *outside* detector**
- **Number of channels : $9720 (10 \times 10 \text{ mm}^2)$**
- **Weight : $\sim 200 \text{ Kg}$**

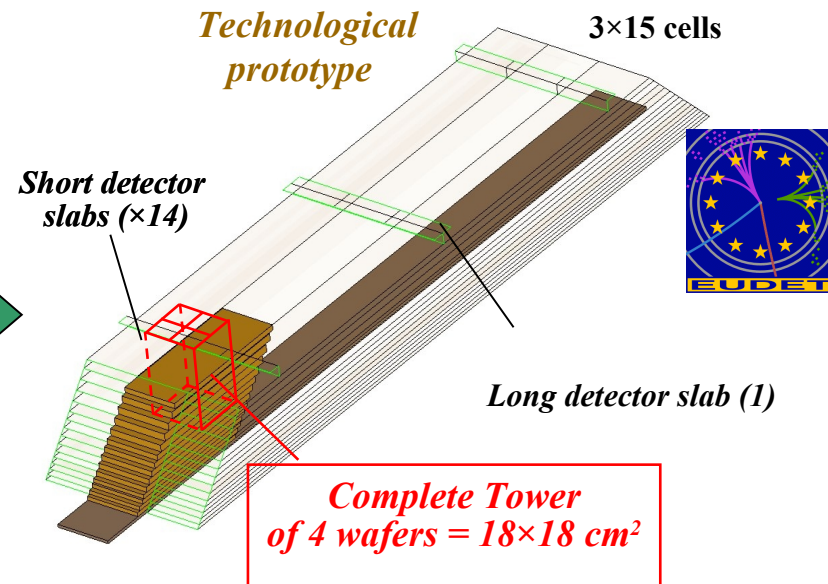


- **1 structure : $\sim 23 X_0$**
($20 \times 2,1\text{mm} + 9 \times 4,2\text{mm}$)
- **sizes : $1560 \times 545 \times 186 \text{ mm}^3$**
- **Thickness of slabs : 6.8 mm**
($W=2,1\text{mm}$)
- **VFE *inside* detector**
- **Number of channels : $45360 (5 \times 5 \text{ mm}^2)$**
- **Weight : $\sim 700 \text{ Kg}$**

First step: Demonstrator

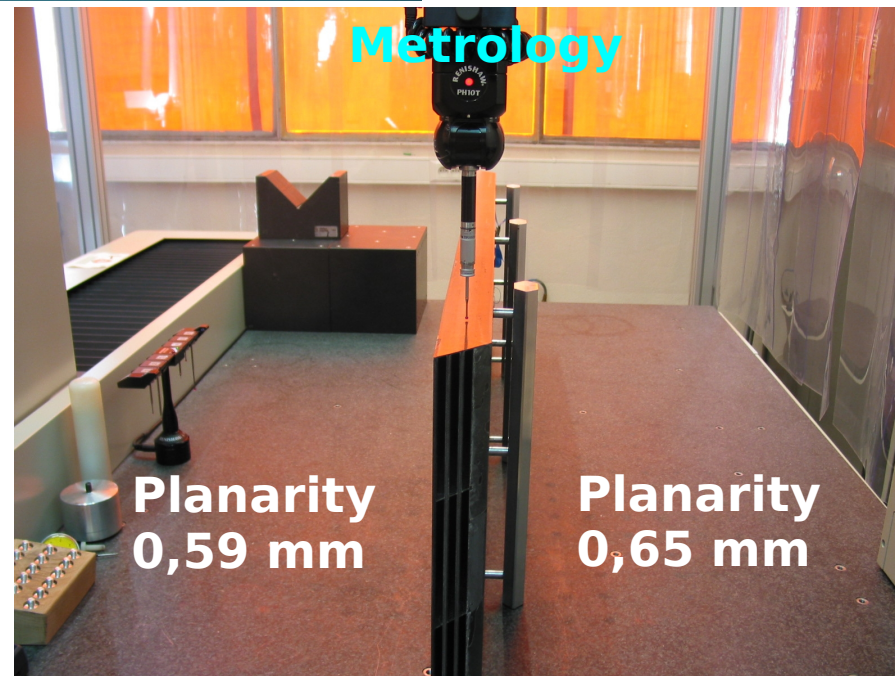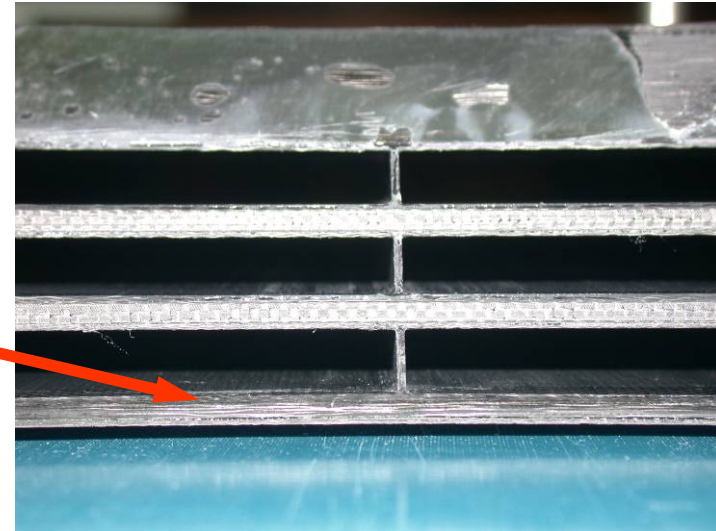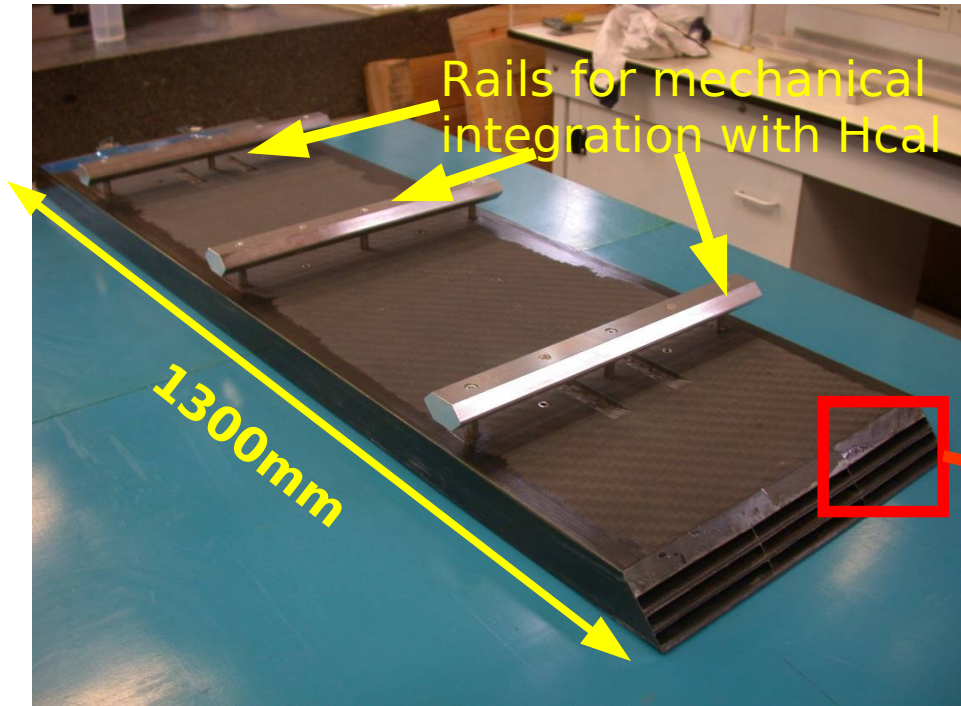


Developing the Techniques for Layer Construction – Thermal Layer

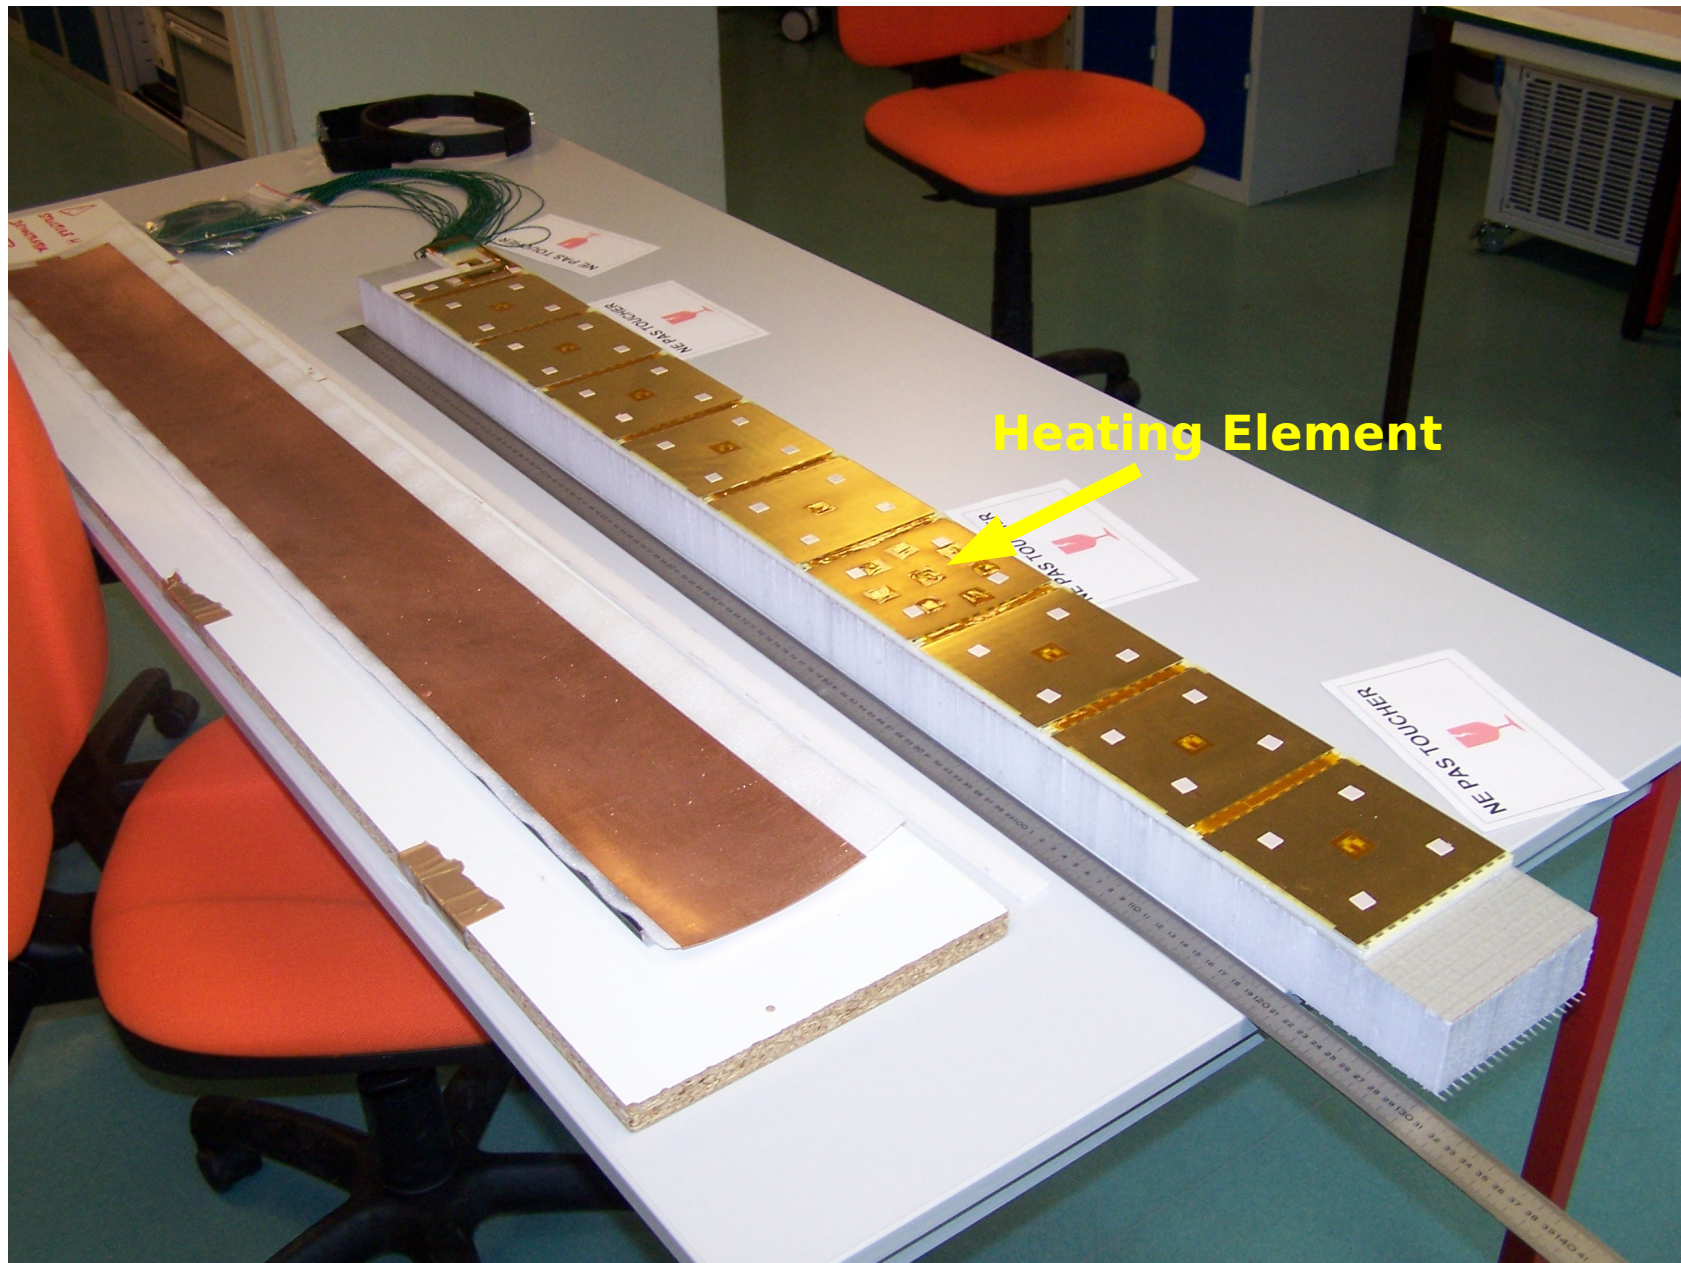

Proof-of-principle to build long layers

Seminar LPSC March 2011

First step: Demonstrator

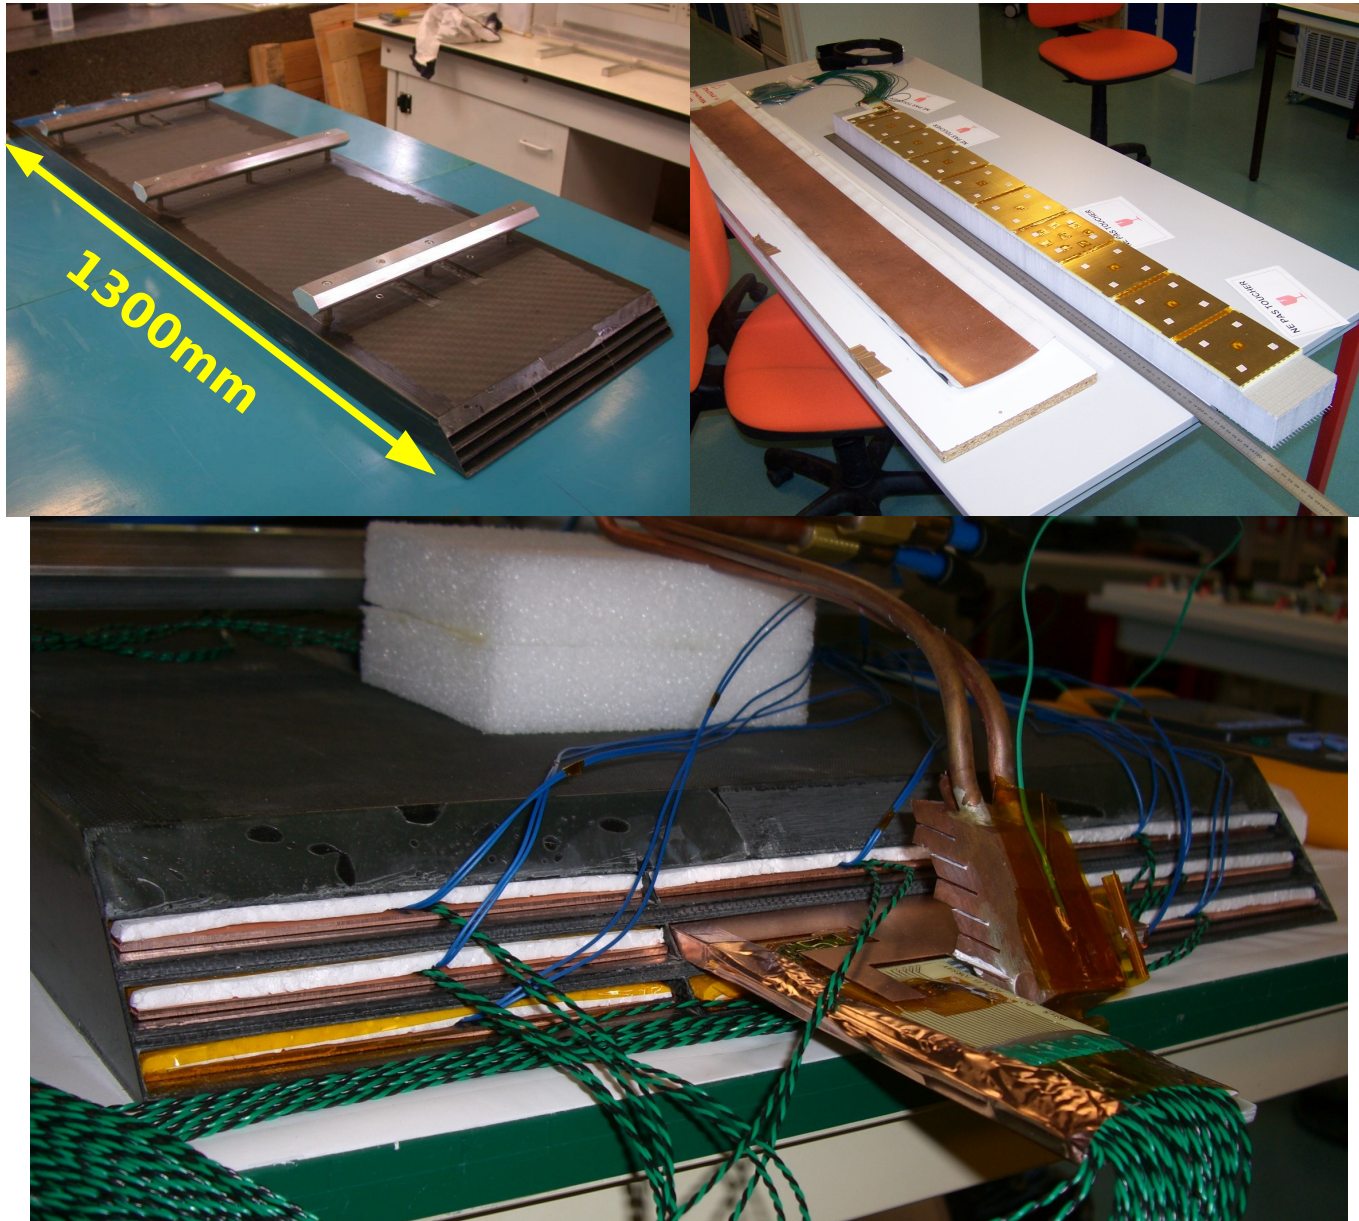


- Detector module realised (from mechanical point of view)
- Demonstrator subject to a thermal test


Seminar LPSC March 2011

Thermal Test

To study thermal behaviour of detector module

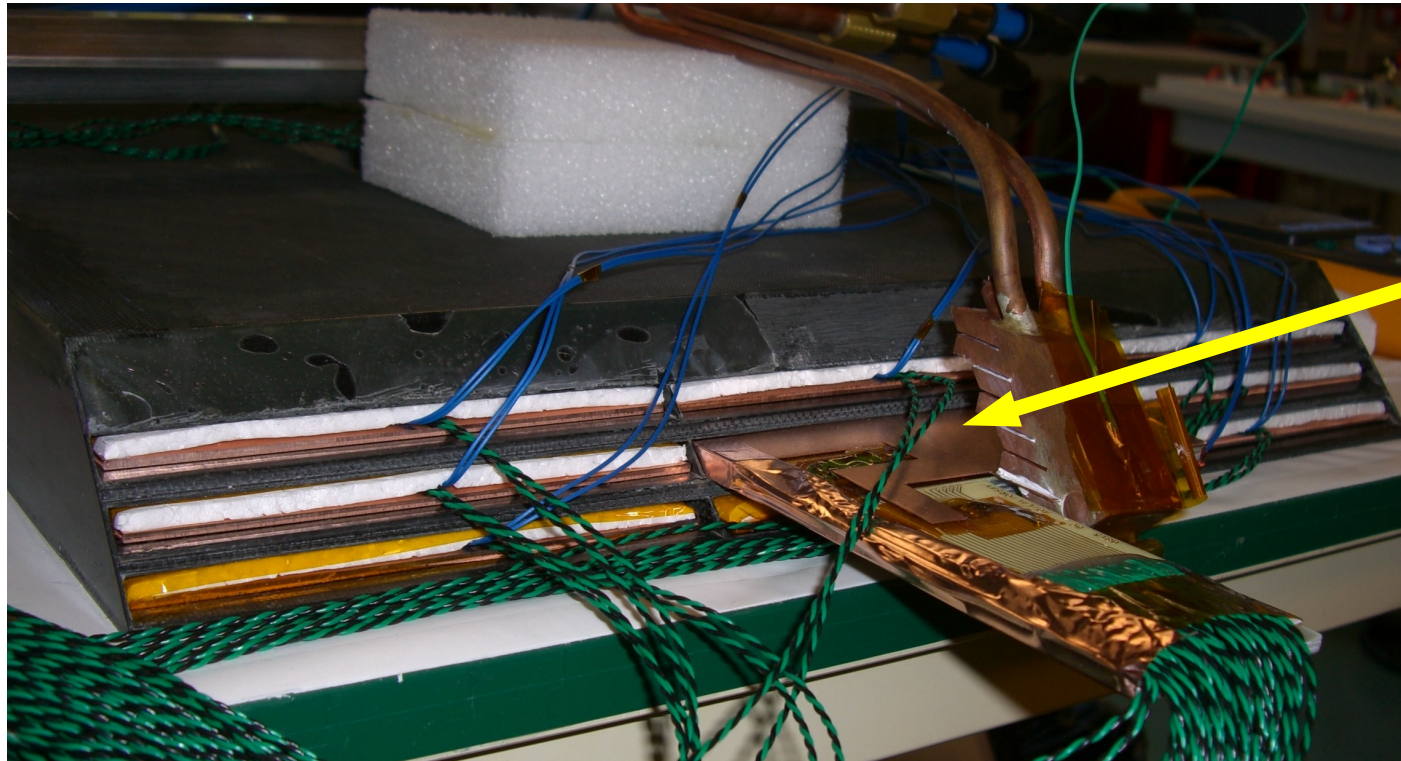

Inserted Thermal Layer

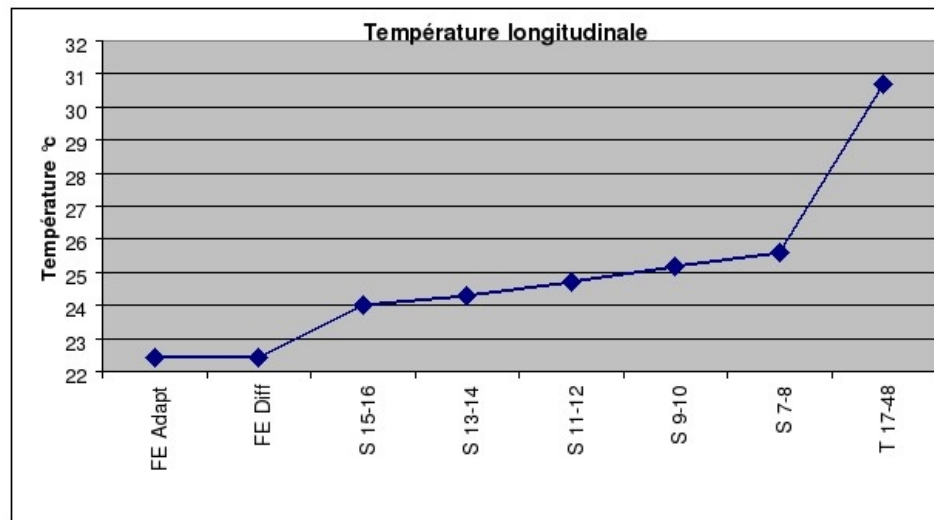

Ambient Temperature	22		
Alveolar Slot	Left	Middle	Right
External		23.5	
Upper	24.8	24.8	24.6
Lower	25	30.7	25.2
Bottom	25.1	25.2	25.1

- Detector Module realised from mechanical point of view
- Thermal test important for DBD

Parties Involved

6 Laboratories are sharing out tasks in according to preferences and localization:





Assembling of **A.S.U.** (industrialization, gluing tests) + backend system (DIF support) + services

LIR of wafers
Global Design + composite Structures


Omega + **Q** PCB with embedded ASICs
ector slabs integration

LPSC Grenoble thermal cooling system
ring system ECAL/HCAL+composite plates

UNIVERSITY OF CAMBRIDGE Interconnection of ASU, DIF

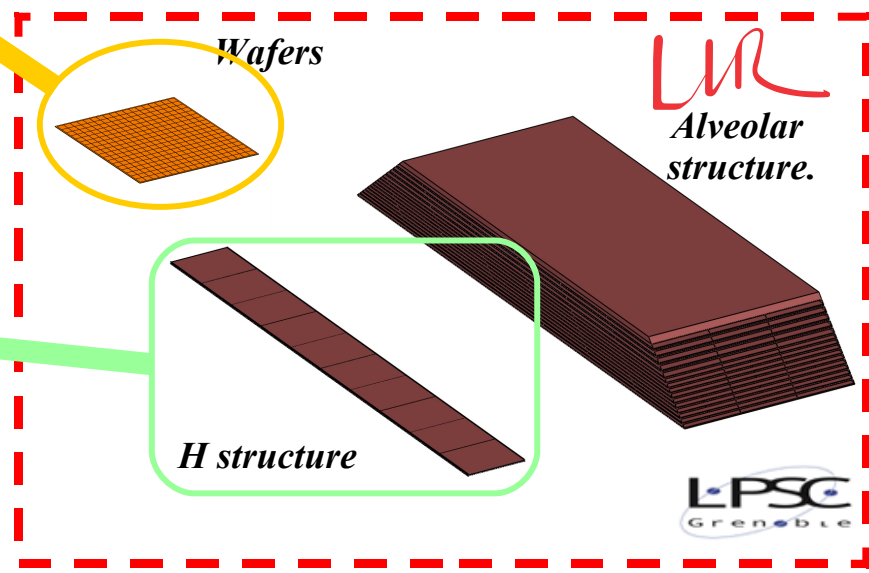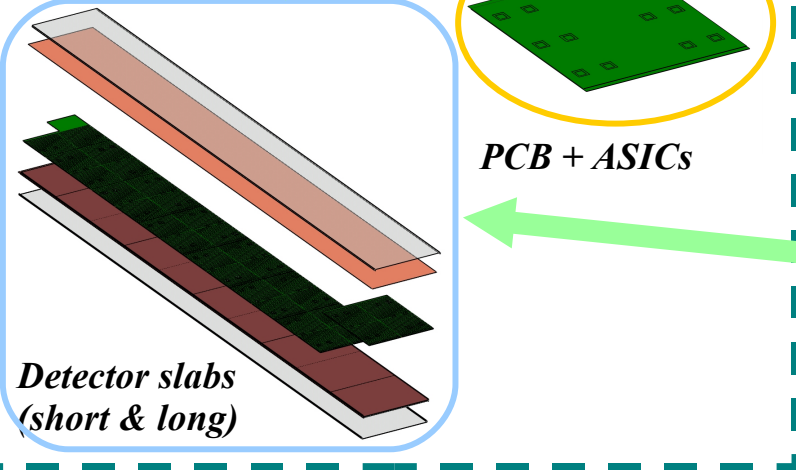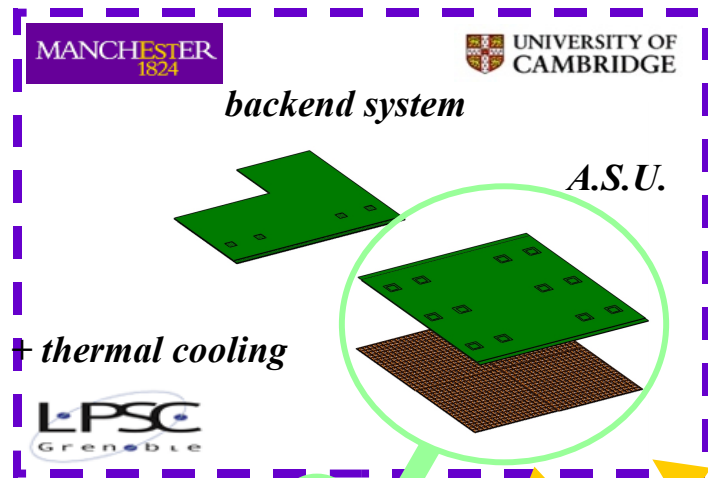

ASICs Frontales: Les Chips ROC

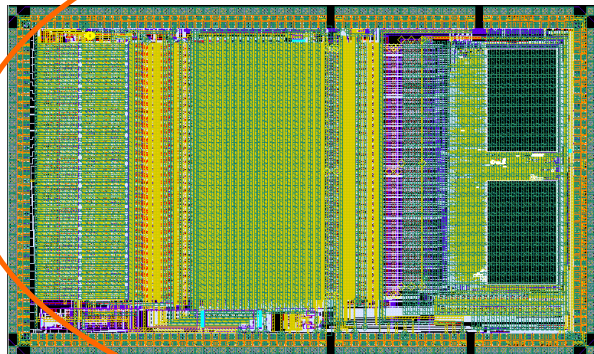


SPIROC

Analog HCAL
(SiPM)

36 ch. 32mm²

June 07

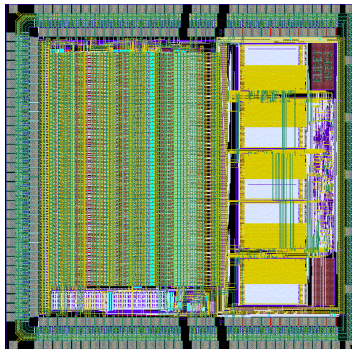


HARDROC

Digital HCAL
(RPC, μ egas or GEMs)

64 ch. 16mm²

Sept 06

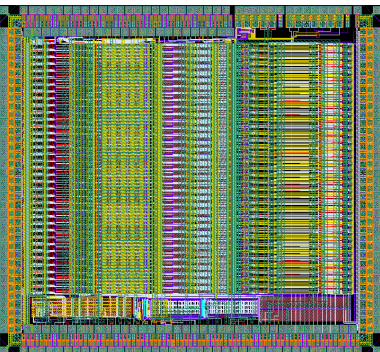

SKIROC

ECAL
(Si PIN diode)

36 ch. 20mm²

Nov 06

- Prototypes EUDET: modules à grande échelle (~2m)
- Financement partiel par EU (06-09)
- ECAL, AHCAL, DHCAL

